



## 2N® SIP Speaker

Take advantage of the 2N® SIP Speaker for playback of live or pre-recorded announcements. This enduring speaker offers a fully-featured audio system with SIP protocol support. What's more, it doesn't need any additional HW or SW investment, e.g. a computer with supporting applications.



Offices and warehouses  
Health care  
Schools  
Shopping centres  
Sports facilities

Parking and Security  
guarded premises  
Government buildings  
and offices  
Other public spaces

### Live and pre-recorded announcements

Broadcast live or pre-recorded announcements. Not only from an IP phone or SIP microphone console but when using an IP PBX, even from your mobile phone.

### Scheduled announcements

This innovative loudspeaker also has the functionality for advanced scheduling. You can thus easily prepare a schedule of reporting, separately for each zone.

### Informacast protocol support

2N® SIP Speaker supports Informacast protocol. Thanks to this you will be able to play the spoken word or sound recording even from Cisco devices.

# 2N® SIP Speaker

## FEATURES & BENEFITS

### Server-less solutions

2N® SIP Speaker is a comprehensive audio solution, with no need of a server. It saves you buying hardware.

### Powerful amplifier

Integral to the speaker is a 2N® SIP Audio Converter with built-in powerful amplifier rated at 2x10W.

### Easy installation

You simply plug the speaker into an existing LAN/WAN network. There is no tricky programming or installation of cabling.

### Simple configuration

You configure the device via a custom Web interface or by using the SW application, which saves you time, especially with larger-scale installations.


### Backup proxy server

In critical situations, you'll appreciate the backup proxy server that allows you to make announcements even in case of a failure or malfunction of the PBX.

### Integration to other systems

The speaker is easily integrated into third-party systems.

## DIAGRAM

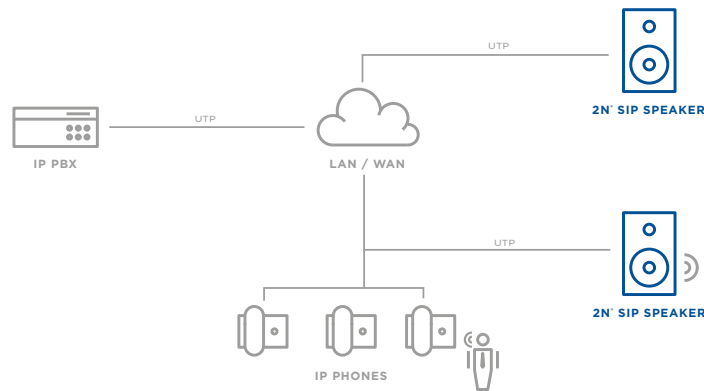

## TECHNICAL PARAMETERS

### Audio parameters

Output	8W PoE / 12W 12V
Sound pressure	99dB (SPLmax)
Impedance	8 Ohm
Frequency range	75Hz - 20KHz
Harmonic distortion	0,05 % @ 1 kHz
Signal-to-noise ratio	91 dB
Audio codecs	G.711 (PCMA, PCMU), G.729 (Annex A, B), G.722, L16/16kHz

### Mechanical properties

Dimensions (h/w/d)	250 x 176 x 143mm
Weight	2,3kg
Colour	Black/White

### Power supply

External power supply	12V DC / 2A
Power over Ethernet	PoE IEEE 802.3af

### LAN connection

RJ-45 connector on rear panel	10/100BASE-TX with Auto-MDIX
-------------------------------	------------------------------

## SOFTWARE

**2N® Network Scanner** - application for detecting speakers on the network

**2N® IP Audio Manager** - application, the nerve-centre of 2N IP audio