


# › The best sides of communication

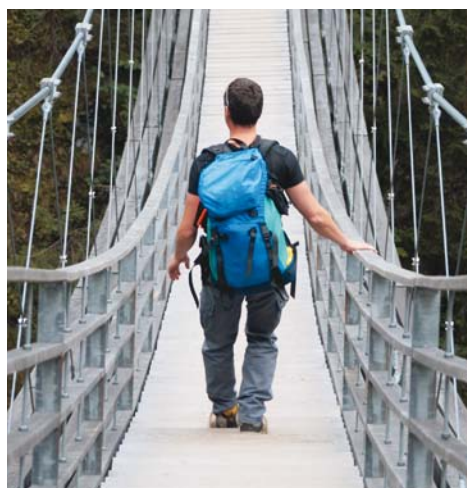

9079/5.2013

## › Radio technology

- ▶ Digital-/Internet-/FM-Radios
- ▶ Action Cameras
- ▶ PMR 446
- ▶ Scanner
- ▶ CB radio
- ▶ Amateur radio
- ▶ Accessories



**Catalogue 2013**

▶ We-stay-in-contact



**ALBRECHT®**

THE WORLD IN COMMUNICATION

## Index

### Radios

- |                          |       |
|--------------------------|-------|
| ▶ Internetradios         | 4 - 5 |
| ▶ Digitalradios (DAB+)   | 6 - 8 |
| ▶ HiFi Bluetooth Speaker | 9     |



> Radios - starting from page 4

### Digital Action Cameras

- |                  |    |
|------------------|----|
| ▶ Action Cameras | 10 |
|------------------|----|



> Action Cameras - starting from page 10

### 2 Way Radios (PMR 446)

- |                            |         |
|----------------------------|---------|
| ▶ 2 Way Radios (PMR 446)   | 12 - 15 |
| ▶ Accessories              | 16 - 17 |
| ▶ Bike communication       | 18      |
| ▶ Function-/accessory list | 15      |
| ▶ Tourist Radio            | 21      |


Page



> PMR 446 - starting from page 12

### Scanner

- |                       |         |
|-----------------------|---------|
| ▶ Scanner devices     | 23 - 25 |
| ▶ Scanner Accessories | 26 - 27 |



> Scanner - starting from page 23

### CB radio

- |                    |         |
|--------------------|---------|
| ▶ CB radio devices | 29 - 34 |
| ▶ Accessories      | 35      |
| ▶ Feature list     | 36      |



> CB radio - starting from page 29

### Amateur radio

- |                         |    |
|-------------------------|----|
| ▶ Amateur radio devices | 38 |
| ▶ Accessories           | 39 |



> Amateur radio - starting from page 38

### Accessories

- |                          |         |
|--------------------------|---------|
| ▶ Microphones            | 40      |
| ▶ Microphone accessories | 41      |
| ▶ Speaker                | 42      |
| ▶ Power supply           | 43      |
| ▶ Inverter               | 43 - 44 |
| ▶ Voltage converter      | 45      |
| ▶ Measuring instruments  | 53      |

### Antennas

- |                         |         |
|-------------------------|---------|
| ▶ CB mobil antennas     | 46 - 50 |
| ▶ CB base antennas      | 51      |
| ▶ Marine radio antennas | 52      |
| ▶ Antenna accessories   | 53 - 56 |

### Plugs

- |                   |         |
|-------------------|---------|
| ▶ Plug/connectors | 57 - 59 |
|-------------------|---------|



## > Internet radio without a computer

Internet radio becomes more and more popular. More and more Internet users stopped listening to their favourite stations via FM radio and now listen via PC or an Internet-enabled radio.

Thanks to Wi-Fi connection these radios connect wireless to the Internet and can play several thousand stations from all over the world – without any PC.

At first they must be integrated in a network with connected DSL router. This works via a network cable or wireless via Wi-Fi. For some of our radios both is an option.

They can receive **more than 10,000 stations from all around the world** when online. The radio can access preset lists of several thousand radio stations sorted by country or genre. Or the user can add new stations via a web page on the PC.

## > DAB/DAB+

Digital radio is based on DAB technology (Digital Audio Broadcasting) and is a European-developed digital standard for transmitting radio signals by air.

Advantages compared to analogue radio:

- Better sound quality (comparable with CD sound)
- Broadcast of additional information possible (text, images, etc.)
- New programmes
- Economic use of existing frequencies

DAB+ is the improvement of DAB and utilizes the latest encoding processes such as DRM.

**NEW!**

The Germany-wide DAB+ network was launched on 1 August 2011 with 27 stations and will be upgraded nationwide until 2015. In other countries, such as Switzerland, this technology already is deployed nationwide.

More informations:  
[www.digitalradio.de](http://www.digitalradio.de)  
[www.worlddab.org](http://www.worlddab.org)

**DIGITALRADIO**  
Radio der Zukunft



**INTERNET RADIO:** Enjoy thousands of Internet-Radiostations with crystal clear sound in the world wide web. They are listed in genre, region, favourites and pod casts.

## Internet-Radio/TV, FM-Radio, Media Player


# DR 870 HD-TV

- ▶ The entire world of Internet entertainment: Internet TV, Internet Radio, Podcast, Shoutcast – all in one small device.
- ▶ Furthermore the DR 870 HD-TV is a media player to playback videos, music and photos. Such a small device and so many functions.
- ▶ Internet TV images, video playback and photos are high-resolution up to HD-quality, the stereo sound is crystal clear.
- ▶ A further plus of the DR 870 HD-TV: It comes with an up-to-date eco function! The alarm function stays activated even if the device is completely turned off. Power consumption in this mode is virtually zero.
- ▶ Connect the DR 870 HD-TV via HDMI cable to your television and enjoy Internet TV in HD quality.



### Features

- ▶ Internet TV (7" TFT display) ▶ Internet Radio
- ▶ Shoutcast (special Internet radio stations) ▶ Podcast
- ▶ Media Player (playback video, MP3, music, photos from internal memory or SD card)
- ▶ Media Streaming via WLAN with UPnP ▶ FM Radio
- ▶ Alarm ▶ 230 V, Mini-USB
- ▶ Ports: HDMI, Mini-USB, LAN, TV out, earphones jack, SD card slot, line-in jack
- ▶ Weight: 850 g ▶ Dimensions: W: 25.8 cm, H: 12.5 cm, D: 5.5 cm



### Scope of delivery

Albrecht DR 870 HD-TV Radio, Remote control  
USB-cable, TV-Out cable, FM antenna, Manual

▶ **Ord.-No.: 27487**

## Internet-Radio Adapter for your HiFi system

# DR 460 W

- ▶ Connecting the world through internet radio
- ▶ Listen to more than 10.000 radio station worldwide
- ▶ Alarmclock radio function
- ▶ Music streaming from PC or Smartphone (Network Audio)
- ▶ Radiostations can be sorted by country, genre, region



### Features

- ▶ Internet radio reception via WiFi
- ▶ Alarmclock radio function
- ▶ You can save 250 favorites for internet radio
- ▶ Weather forecast is displayed on the standby screen
- ▶ Energy saving mode/dimmer
- ▶ Power supply: 230 V wall adapter ▶ Line-Out socket Cinch
- ▶ 6 OSD languages: German, English, French, Spanish, Portuguese, Italian
- ▶ WLAN: 802.11 b/g ▶ WLAN Buffer 2/4/8 Sec.
- ▶ Mediastreaming via UPnP ▶ USB socket for firmware updates
- ▶ Dimensions: 190 x 75 x 35 mm ▶ Weight: 220 g



### Scope of delivery:

Remote control + battery,  
RCA Cable, AC adaptor

▶ **Ord.-No.: 27461**

## Internet-/FM Radio



# DR 402

- ▶ Internet radio reception via WiFi
- ▶ FM Stereo receiver with RDS-function
- ▶ You can save 250 favorites for internet radio and 20 for FM radio
- ▶ Alarmclock radio function
- ▶ Power supply: 230V wall adapter or with the built-in lithium battery up to 4 hours of playing time


### Features

- ▶ Weather forecast is displayed in the standby screen
- ▶ Power supply: 230V wall adapter or with the built-in lithium battery up to 4 hours of playing time
- ▶ Line-Out socket 3,5 mm
- ▶ 6 OSD languages: German, English, French, Spanish, Portuguese, Italian
- ▶ WLAN: 802.11 b/g
- ▶ Mediastreaming: Play music from your PC or Smartphone on the radio via UPnP and DLNA
- ▶ Dimensions: W: 180 mm, H: 101 mm, D: 52 mm
- ▶ Weight: 500 g

### Scope of delivery

Telescopic antenna, 230 V power supply, Line-Out cable

- ▶ **Ord.-No.:** 27402

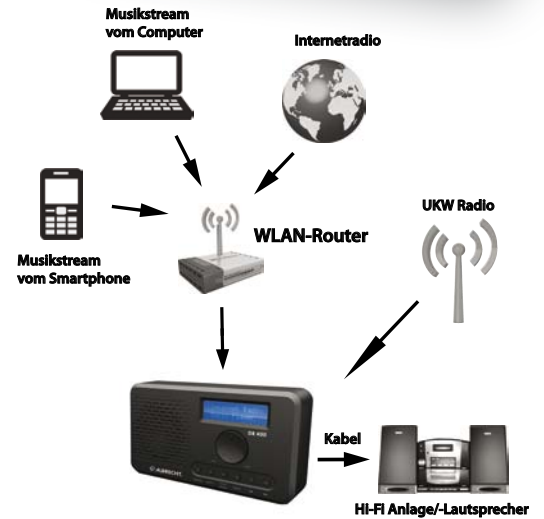

## Internet-, Digital-, FM Radio

# DR 315-FB4

The DR 315 gives you the possibility to receive DAB, DAB+, Internet and FM radiostations with one receiver. All this in a smart and glossy black chassis.

- ▶ Streaming to computers in networks
- ▶ Web interface to add your own Internet radio station list
- ▶ FM Stereo receiver with RDS-function
- ▶ Integrated WLAN module & antenna
- ▶ RJ-41 LAN network connector ▶ uPnP support
- ▶ WLAN security/encryption: WEP, WPA, WPA2
- ▶ Frequency bands: DAB: Band III: 174 - 240 MHz, FM: 88 - 108 MHz
- ▶ Manual/automatic scan-function ▶ Date and time display
- ▶ Alarm clock and sleep mode
- ▶ Program description, station name and quality of the received signal is shown in the display
- ▶ Telescopic antenna for DAB and FM radio
- ▶ 3 level switch for LCD illumination brightness
- ▶ Power supply: 230 V wall adaptor
- ▶ Output level: 2 x 5 W RMS/CH
- ▶ Dimensions: B: 280 mm, H: 155 mm, T: 210 mm



### Scope of delivery

Remote control, Telescopic antenna, 230 V power supply

- ▶ **Ord.-No.:** 27342

The first digital radio in our new ALBRECHT design series

NEW!

DIGITALRADIO  
Radio der Zukunft

# DR 900

- ▶ Design aluminium housing
- ▶ DAB+/FM Radio
- ▶ Equalizer
- ▶ 2 high quality speaker with 8 Watt each
- ▶ 2 passive bass speakers



### Scope of delivery

Remote control, Telescopic antenna, 230 V AC charger

▶ **Ord.-No.: 27900**



The newest ALBRECHT Audio digital radio was developed, with priority on design and value of the radio, in cooperation with the famous German product designer Ruediger Bahorski.

The great look of the DR900 is given through the interaction of the brushed aluminum and the noble black mesh of the speaker, which highlights every room.

The harmonic and crystal clear sound guarantees a fantastic listening experience.

The ALBRECHT DR 900 combines the digital radio variety with a perfect design.



- ▶ DAB/DAB+/FM
- ▶ Audio output power 2 x 8 W
- ▶ 2 Passive Speaker
- ▶ LC-Display
- ▶ Design Aluminium housing
- ▶ 10 Preset Stations DAB
- ▶ 10 Preset Stations FM
- ▶ Equalizer
- ▶ Alarm Clock (2)
- ▶ Sleep Timer
- ▶ Remote control
- ▶ Size: 220 x 120 x 120 mm
- ▶ Weight: 1.25 kg
- Connections:
  - ▶ Aux-In
  - ▶ Earphone
  - ▶ USB (only service)

**DIGITAL RADIO:** Digital radio means more stations and crystal clear sound for digital music broadcasts and more information than in traditional RDS.

## Digital-/FM-Radio with Touchscreen

# DR 333

Get the advantage of Digital Radio and see the Slideshow and pictures send by the broadcaster e.g. Artist, Disk cover, News, Weather on our large color display.

Digital radio means more stations and crystal clear sound for digital music broadcasts and more information than in traditional RDS.

The ALBRECHT DR 333 is a digital and FM radio in modern design. For both radio bands 10 preset buttons each are available.

### Features

- ▶ DAB/DAB+/FM Radio (RDS)
- ▶ Several Alarm clock mode functions and intervals
- ▶ Sleep-Timer and Snooze function
- ▶ Date and time display
- ▶ Station preset for 10 DAB and 10 FM stations
- ▶ 3,5 mm headphone jack
- ▶ Big high-quality LC Display
- ▶ Telescopic antenna
- ▶ Equalizer
- ▶ AC power adapter
- ▶ Dimensions: W: 250 mm, D: 131 mm, H: 134 mm



Mittelklasse **1,5**  
 Preis/Leistung:  
 sehr gut  
**Digital Home** 1/2013



### Scope of delivery

Remote control,  
 Line-In cable,  
 Telescopic antenna,  
 230 V power supply

▶ Ord.-No.: 27333



## Digital-/FM-Radio

# DR 330

The ALBRECHT DR 330 is a digital and FM radio in a modern design. There are 12 presets for each band available.

### Features

- ▶ DAB/DAB+/FM Radio (RDS)
- ▶ Several Alarm clock mode functions and intervals
- ▶ Sleep-Timer and Snooze function
- ▶ Date and time display
- ▶ Station preset for 12 DAB and 12 FM stations
- ▶ 3,5 mm headphone jack
- ▶ Big high-quality LC Display
- ▶ Telescopic antenna
- ▶ Equalizer
- ▶ AC power adapter
- ▶ Dimensions: W: 250 mm, D: 131 mm, H: 134 mm



### Scope of delivery

Remote control,  
 Telescopic antenna,  
 230 V power supply

▶ Ord.-No.: 27330



## Digital-/FM-Radio Adapter

# DR 50

The Albrecht DR 50 is a combined FM and DAB/DAB+ broadcast radio receiver for connection to your HiFi system.

- ▶ DAB/DAB+ (with DLS) and FM (with RDS) Radio Adapter
- ▶ 3 line display with blue background lighting
- ▶ Remote control
- ▶ 5 different contrasts
- ▶ Manual and automatic tune
- ▶ 2 programmable alarms (DAB/FM/Beep)
- ▶ Sleep timer
- ▶ Time and date displayed
- ▶ 10 preset stations each for DAB and FM channels
- ▶ 3,5 mm line-out jack for connection to a stereo or headphones
- ▶ Connection for external antenna
- ▶ Dimensions: W: 135 mm, D: 39 mm, H: 92 mm
- ▶ Weight: 150 g



Installation example



### Scope of delivery

Albrecht DR50, remote control, FM/DAB antenna cable, DC adapter, 75 ohm adapter, cinch cable, manual

- ▶ Ord.-No.: 27355

**DAB-display:** mono/stereo 32/64 Kbps, DLS (artist, song, album), band/frequency, genre e.g. jazz or pop music, time and date

**FM-display:** channel name, RDS, time and date, genre, mono/stereo

## Digital-/FM-Radio

# DR 80

The Albrecht DR80 is a combined FM and DAB/DAB+ broadcast radio receiver that comes in a very modern retro design.

There are 8 station presets for both DAB and FM radio.

### The highlight:

The DR80 can be used everywhere with batteries and is your ideal companion while travelling.

- ▶ DAB/DAB+/FM broadcast radio
- ▶ DRC (Dynamic Range Control – only in DAB/DAB+ mode)
- ▶ Alarm clock/sleep mode function
- ▶ Station preset for 8 DAB and 8 FM stations
- ▶ Date and time display
- ▶ True power switch off
- ▶ 3,5 mm headphone jack
- ▶ LC display (blue)
- ▶ Telescopic antenna
- ▶ Antenna input
- ▶ Power by DC adapter or 6 AA batteries (not included)
- ▶ AC wall adapter included
- ▶ Dimensions: 176 mm x 110 mm x 100 mm
- ▶ Weight: approx. 400 g



### Scope of delivery

Telescopic antenna, Power supply

- ▶ Ord.-No.: 27390





## HiFi Bluetooth speaker and hands free talking device

# MAX-treme Bluetooth®

**Amazing:** This small wireless HiFi speaker creates phenomenal powerful volume and crystal-clear sound!

You can easily connect your smartphone, tablet or notebook to the MAX-treme via Bluetooth or the included audio cable. Now you can enjoy your favorite music everywhere you are: at home, in your garden, on the road, etc.

The MAX-treme is also very suitable as hands free speaking device or for conference calls.

### Specifications

- ▶ 2 x 3 Watt Class-D digital power amplifier
- ▶ Battery power: 1000 mAh
- ▶ Bluetooth version: v2.1+EDR
- ▶ Frequency range: 25 Hz – 25 kHz
- ▶ Weight: 165 g
- ▶ Measurements: 150 x 32,5 x 54 mm

### Scope of delivery

Stereo audio cable, USB cable, exchangeable battery  
▶ **Ord.-No.:** 27610



### Also available in other colors

- Gold ▶ **Ord.-No.:** 27612
- Blue ▶ **Ord.-No.:** 27613
- Pink ▶ **Ord.-No.:** 27614



## HiFi Bluetooth speaker. Enjoy music in a new way!

# MAX-twist Bluetooth®

You can easily connect your smartphone, tablet or notebook to the MAX-twist via Bluetooth or the included audio cable. Experience up to 8 hours the beautiful sound of your favorite music.

The MAX-twist is not only comfortably small but also has a soft anti-slip surface. Disguised in a one of a kind modern design it is very suitable for conference calls or as a hands-free device.

### Specifications

- ▶ 2 x 3 Watt Class-D digital power amplifier
- ▶ Battery power: 1200 mAh
- ▶ Bluetooth version: v2.1+EDR
- ▶ Frequency range: 30 Hz – 25 kHz
- ▶ Weight: 320 g
- ▶ Measurements: 250 x 60 x 55 mm

### Scope of delivery

Stereo audio cable, USB cable, exchangeable battery  
▶ **Ord.-No.:** 27611



## Digital Action Camera

# DV 100 WP



Waterproof Ultra-small digital Video Camera.  
Easy to use and big fun.

- ▶ Video resolution 736 x 480 VGA
- ▶ Battery life 1.5 - 2 Std.
- ▶ USB 2.0 (high speed)
- ▶ Memory 4 GB implemented
- ▶ Weight 22 g
- ▶ Dimensions Ø 19 mm, 68 mm Länge
- ▶ Operating system Windows: 98, -Me, -XP, -2000, -Vista, -7, Apple: Mac



### Scope of delivery

Adjustable mount, 2 GB SD card, USB cable and adapter, Lanyard

▶ Ord.-No.: 21200



## Digital Action Camera

# Mini DV110

Ultra-small Digital Video Camera

Mini DV 110 is a high-quality, easy to use digital video camera with sound control in elegant design. It is handy and has its place just about everywhere: in sports, during holidays, for monitoring, in the car... The camera supports up to 8 GB memory cards. Battery operating time: approx. 2 hours. Recording capacity on 2 GB SD memory cards: approx. 30 - 40 minutes.

- |                              |  |
|------------------------------|--|
| Video encoding:              | M-JPEG   |
| Video resolution:            | 680 x 480                                      |
| Supported operating systems: | Windows, ME/2000/XP/2003/<br>Vista/Mac OS 10.4 |
| Battery life:                | about 2 h                                      |
| Battery:                     | Lithium polymer rechargeable battery           |
| Dimensions                   | H: 63 mm, 28 mm, T: 18 mm                      |



### Scope of delivery

Adjustable mount, Clip mount, USB cable CD incl. driver, Lanyard

▶ Ord.-No.: 21110

## Action Camera with GPS

# DV 300 GP



Innovative Sport Digital Video Recorder combined with GPS travelling data

- ▶ Super video quality/high resolution 640 x 480 (VGA)
- ▶ User-friendly Video Player which displays Speed/Location/Altitude/Time/Distance/Compass
- ▶ The video player connects automatically to Google Maps to show the whole route
- ▶ Supports Multi-Language, Time Zone selected and SBAS
- ▶ Compact size housing mounted easily on the helmet and handle-bar
- ▶ Water resistant/stylish housing design with built in microphone
- ▶ Two AAA batteries (not included) which can be changed easily



- ▶ Good Video Compression
- ▶ Max. up to 32 GB Micro SD
- ▶ Micro SD card (transfer rate min. 6 MB/s) and card reader not included.
- ▶ Warning reminder for low battery power and full memory
- ▶ Inclusive high-quality mounting for helmet and steering wheel

### Scope of delivery

high-quality mounting for helmet and steering wheel

▶ Ord.-No.: 21300



Videos with additional information such as Speed/Location/Altitude/Time/Distance/Compass



## > PMR 446

2-way radios which you can use to communicate for free, anywhere and anytime.

**Private channels CTCSS/DCS:** By using the same CTCSS/DCS codes you can talk to your friends or colleagues without getting disturbed by others. So there won't be any interferences by communications of others. This is especially useful in baby mode because your radio will only react to the baby monitor.

**PTT button:** Push to talk button on the radio or external. This button has to be pressed in order to speak to your partner.

**Vox-Activation:** With the Vox function it is possible to transmit without pressing the PTT button (handsfree function). The radio will be activated by detecting your speech automatically.

**Scan:** Automatic search run on all 8 channels to find other people who are communicating.

**Dual Watch:** The radio automatically switches between your current channel and your priority channel. If it detects an active communication on the priority channel it will stay on this channel otherwise it will switch back to the current channel.

**Call:** Transmission of a tone which is received by others. Depending on the radio there are several tones similar to the ring tones on your mobile phone.

**Monitor:** This function disables the noise squelch temporarily, you can use it to hear very faint signals. But you will also hear the noise on the channel.

**Keylock:** This will protect you against unintended changes of your settings.


**Battery indicator:** Shows the approximate charging status of the batteries.


**Baby monitoring:** A function which helps you to observe babies, children or sick people.



### > Ranges of walkie-talkies (PMR 446)

Vacant land, over water, etc. at a clear visual contact  up to 10 km and more

Slightly elevated, in forests, etc.  up to 5 km

In lightly built-up terrain, between vehicles and motorcycles  up to 2 km

Within towns, in cities, etc. (depending on the development) up to 1.5 km

Within very developed cities or if the antenna is covered, i.e. in a jacket pocket up to 800 m

Within steel concrete buildings up to 400 m

► possible range ...



Up to 10 km range, 8 channels, 500 mW

### PMR 446 2-Way Radio

#### > Tectalk Easy

A small 2-way radio easy to operate at a very good price/efficiency ratio.

The two exchangeable front panels provide variety.

The switchable output power level provide a low power consumption. The call signaling and scanning function round out the control comfort.

- ✓ Exchangeable front panel (silver/black)
- ✓ Switchable power
- ✓ Scan function



**Tectalk easy pair:**  
2 devices, 4 front panels  
2 belt clips

► Ord.-No.: 29680



► possible range ...



Up to 10 km range, 8 channels, 500 mW

### PMR 446 2-Way Radio

#### > Tectalk Smart+

Small, light-weight and equipped with useful additional functions, the easy handling of these walkie-talkies will convince you. Whether at leisure activities or sports - there is no limit to use the Tectalk Smart+. Each of the channels can be coded with one of the 38 subcodes, which means undisturbed conversations between you and your partner. The hands free function (Vox) allows conversation without pushing the PTT-button, which can also be used as baby monitoring.

- ✓ 38 subcodes (CTCSS) for undisturbed conversations
- ✓ Hands free function (Vox)/ baby monitoring

**Tectalk Smart+ pair - orange:**  
2 devices, 2 belt clips (360°)

► Ord.-No.: 29883

**Tectalk Smart+set - black/silver:**  
2 devices, 2 headsets,  
wall and desktop charger, 6 rech.  
batteries, 2 belt clips (360°)

► Ord.-No.: 29884

**Replacement headsets:**

► Ord.-No.: 41925

**Twin Desktop charger:**

► Ord.-No.: 29894



► possible range ...



Up to 10 km range, 8 channels, 500 mW

## PMR 446 2-Way Radio

### > Tectalk Smart XL

The XL version of the popular Tectalk Smart+ has the additional features:

- 24 channels
- Large LC-display
- Microphone Gain Selection  
**Low:** for noisy surroundings e.g. on your motorbike  
**High:** for indoor surveillance or baby monitoring

**Tectalk FM+ pair:**  
2 Tectalk Smart XL,  
2 headsets, 2 belt clips,  
8 rechargeable batteries  
and double charger

► **Ord.-No.: 29888**

- ✓ Hands free function/  
baby monitoring(Vox)
- ✓ Microphone Gain Selection low/high
- ✓ 24 pre-programmed channels
- ✓ 38 subcodes per channel
- ✓ Energy save mode
- ✓ Call
- ✓ Scan



24 Channels



► possible range ...



Up to 10 km range, 8 channels, 500 mW

## PMR 446 2-Way Radio

### > Tectalk Action Pro

The Tectalk Action Pro's sophisticated technology comes in an ultra thin alu/metal casing. This appeals to the semi-professional user as well as the demanding private user. The integrated intercom function rounds off the comfort for bikers.

Channel encoding and scrambler provide undisturbed conversation and the convenient hands-free function allows radio contacts without pressing the PTT button.

The first-class transmission quality of the Tectalk Action Pro is due to its audio compander and it comes with a flash light as a little bonus.

The included intelligent charging cradle allows fast charging and ensures trickle charge of the built-in battery.

- ✓ Aluminium case - ultra slim
- ✓ Audio compander for better transmission quality
- ✓ 38 CTCSS tones
- ✓ Intelligent desk charger
- ✓ Built-in lithium ion battery, 780 mAh
- ✓ Lamp ✓ Room monitoring ✓ Scrambler
- ✓ Intercom function (with optional accessory)

Intercomfunction  
Scrambler



► **Optional accessories:**  
Intercom Adapter  
**Ord.-No.: 41944**  
  
12 V charger  
**Ord.-No.: 73751**



Only 15 mm

**Tectalk Action Pro**  
1 device  
1 intelligent desk charger  
1 AC adapter  
► **Ord.-No.: 29850**

► possible range ...



Up to 10 km range, 8 channels, 500 mW

PMR 446 2-Way Radio

> Tectalk Contact 2

Tectalk Contact 2 – a PMR 446 Radio with a high range of application. Built for private and professional use. This very solid and user friendly radio guarantees the connection to your partner.

The ►intelligent► desktop charger, charges AA batteries controlled and very fast. If the batteries are fully loaded, the charger turns into conservation charging mode. For sales outside EU the transmitting power can be adjusted by software up to 2,5 - 3,0 Watts.

- ✓ The surface is rubber coated
- ✓ 38 CTCSS/104 DCS subcodes for undisturbed conversations
- ✓ Hands free function on 3 levels
- ✓ Audiocompander function for a better transmission
- ✓ 20 programmable channels by optional software between 446 to 448 Mhz.



**Tectalk Contact 2**

1 device, 1 intelligent fast charger  
3 AA rech. batteries, 1500 mAh  
1 belt clip

► Ord.-No.: 29740

**Optional accessories:**

**12 V car charger:**  
incl. cig.-lighter cable

► Ord.-No.: 29251

**Double desktop charger:**  
without AC adapter

► Ord.-No.: 29743

**USB programming kit and -software**

► Ord.-No.: 29745

**Carry-case**

► Ord.-No.: 29744



► possible range ...



Up to 10 km range, 8 channels, 500 mW

PMR 446 2-Way Radio

> Tectalk Pro XL

**Semi-Professional PMR 446 2-Way Radio IP 54:** The Tectalk Pro XL is the ideal for reliable communications in the toughest environment with its proven IP 54 structures.

Menu Driven System as well as PC programming: Easy to operate and highly adaptable, through the use of a menu driven configuration system as well as PC programmable function.

Smart Charging System: Each radio is supplied with an intelligent desktop charger (Semi Quick Charger).

Compact, handy design and rugged: Very few compact commercial PMR 446 Radio can deliver so much versatility and functionality in this compact and handy size. This is also rugged and conforms military standard.

- ✓ Clone function
- ✓ CTCSS and DCS codes
- ✓ Waterproof IP-54
- ✓ Semi quick charger (4 - 5 hours)
- ✓ Time out timer



**Tectalk Pro XL:**

1 device, desktop charger,  
Li-Ionen battery (1000 mAh),  
protection bag

► Ord.-No.: 29786

**Tectalk Pro Mobil:** with mag mount  
antenna (for more range )

► Ord.-No.: 29784

**PC programmable set**  
**NEW:** now with USB connection

► Ord.-No.: 29798

**Battery-Eliminator TBP- 1100:**  
for 12 V operations

► Ord.-No.: 29799

**Rechargeable battery, 1600 mAh:**

► Ord.-No.: 29787

**TCC 1000:** Clone cable

► Ord.-No.: 29788

**Flexible antenna**  
for ham radio use:  
35 cm, 430 - 446 MHz, 5 dBi

► Ord.-No.: 29796

**Leather Carry Case**

► Ord.-No.: 29795



► possible range ...



Up to 10 km range, 8 channels, 500 mW



## Professional Walkie Talkie (PMR446) for craftsmen

### > Tectalk Worker

A suitcase including everything necessary for the contact to the colleagues on the construction site: Radio devices, microphones, rechargeable battery packs, chargers.

**Just charge them and you are ready to go!**

- ✓ No registration – no fees
- ✓ Extreme robust & waterproof housing
- ✓ Hands free communication
- ✓ Flashlight... and many more advantages

#### Scope of delivery

2 Tectalk Worker PMR446 radio devices, 2 handheld speaker microphones, 2 desktop-chargers, 2 Battery packs, 2 wristbands, 2 belt clips, 1 hard case

► **Ord.-No.: 29830**



- 16 channels (2 x 8 PMR446 CH)
- Extreme robust & waterproof housing
- Flashlight
- Time-Out-Timer
- Channel scan (adjustable)
- Built-in VOX function
- channel busy display and – block function
- CTCSS/DCS Codes
- Frequency: 446.0 – 446.1 MHz
- Programmable (optional software) frequencies: 400 – 470 MHz for amateur radio operators
- Lithium-Ion-Battery Pack 3.7 V, 1200 mAh
- Operation time: 8 hours
- Intelligent desktop-charger for 230 Volt AC
- Measurements per radio: 115 x 60 x 33 mm
- Weight: 150 g
- Measurement hard case: L: 34 cm x B: 27,5 cm x T: 8 cm
- Total weight: 1,5 Kg

#### Optional Accessories

- USB-Programming cable for Tectalk Worker, **Ord.-No.: 35275**
- Headset MA21-2K, **Ord.-No.: C709.04**
- Microfon MA 31-2K, **Ord.-No.: C732.04**
- Microfon MA22-K, **Ord.-No.: C844**
- Battery Pack, **Ord.-No.: 29831**
- Speaker microphone, **Ord.-No.: 29832**

## PMR 446 2-Way Radio

	Tectalk Easy	Tectalk Fun	Tectalk Smart+	Tectalk Smart XL	Tec. Action Pro	Tectalk Contact2	Tectalk Pro XL	Tectalk Worker
8 channels	●	●	●	●	●	●	●	2 x 8
Range up to 10 km	●	●	●	●	●	●	●	●
Transmission power/mW	500/50	500/50	500	500	500	500	500/50	500
Keyboard interlock	○	○	●	●	●	●	●	●
Call-tones	1	1	3	1	3	5	5	1
Vox	○	○	●	●	●	●	●	●
Vox-steps	○	○	1	1	2	3	5	1
38 CTCSS tones	○	○	●	●	●	●	50	●
104 DCS tones	○	○	○	○	○	●	●	●
Scrambler	○	○	○	○	●	○	○	○
Scan	●	●	●	●	●	●	●	●
Programmable	○	○	○	○	○	●	●	●
Dual watch	○	○	○	○	●	●	●	○
Power save mode	●	●	●	●	●	●	●	●
Battery low display	acoustic signal	●	●	●	●	●	●	●
Charger	○	○	●	●	●	●	●	●
Charger port	○	●	●	●	●	●	●	●
Rechargeable battery (mAh)	○	○	650	650	780	1500	1000	1200
Headset socket 2,5/3,5 mm, twin	○	○	○	○	●	●	●	● Kenwood
Headset socket 2,5 mm, single	○	○	●	●	○	○	○	○
Dimensions mm (W H D)	52 122 30	60 125 28	45 120 25	56 155 29	55 140 15	55 175 25	60 180 25	60x115x33
Weight incl. rechargeable battery packs	117	87	92	128	85	178	185	150
Batteries	3 AAA	3 AAA	3 AAA	4 AAA	Li-Ion	3 AA	Li-Ion	Li-Ion

## PMR 446 2-Way Radio Accessories

### AE 31 S - Security Headset



The Clear Tube makes it a highly professional headset to carry out assignments inconspicuously. Connection with twin plug 3,5/2,5 mm.

► **Ord.-No.: 41997**


### AE 31 CL2 - Security Headset

The Albrecht Security Headset with integrated microphone in the PTT-button is suitable for usage e.g. with MIDLAND HP 450-2 A, if you wish a very loud and clear transmission or where other acoustic tubes are simply not sufficient.

The innovative headset allows you to use the device hands-free or in PTT mode without an additional selection on the microphone.

Microphone connector: 2,5/3,5 mm twin plug.


► **Ord.-No.: 41999**

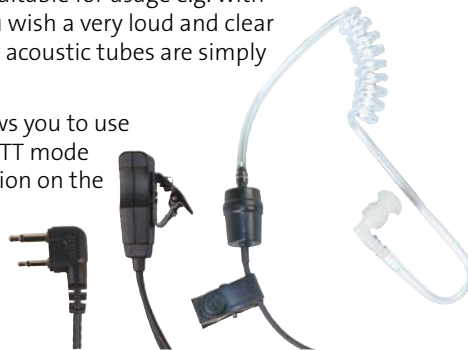

### AE 31 - Security Headset

Semi professional - Clear Tube - headset with big PTT, 2,5/3,5 mm twin plug, **automatic vox circuit**

► **Ord.-No.: 41990**

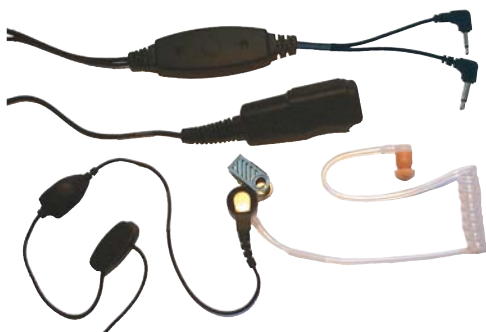

### AE 37/AE 30 - Headsets

**AE 37**  
A combined insert earphone/microphone, available with vox or transmission key operation/switchable, with 2,5 mm single plug.

► **Ord.-No.: 41915**

**AE 30**  
Same like AE 37 but with 2,5/3,5 mm twin plug.

► **Ord.-No.: 41830**



### Throat Activated Microphones



**AE 38 S2**  
Dual throat Activated Microphone with automatic vox circuit for high noise and tactical environments. Dual microphone system provides the highest audio

transmission quality possible cutting down on ambient and nearby noise perfectly. The patented D-Shaped earphone uses rubber ear loop which holds the earphone in place comfortably and provides privacy and discreet communication.

► **Ord.-No.: 41918**



### AE 38

Single throat Activated Microphone with earphone and switch for Vox or PTT, separate PTT-button with velcro fastening. 2,5/3,5 mm duo plug.

► **Ord.-No.: 41910**



### HS 01 - Headset for sport and work



This rugged neck headset has a flexible boom microphone which provides ideal fit and maximum comfort. It features a heavy duty cable for maximum durability, PRX switch, **automatic vox circuit**, 360 degree rotating clip, Push-To-Talk with Vox/PTT switch, also an optional finger PTT. Meets IP-55. 3,5/2,5 mm Twin plug

► **Ord.-No.: 41917**





## PMR 446 2-Way Radio Accessories

### SHS 300i

Motorcycle helmet stereo headset for smartphones such as iPhone and Blackberry. With microphone and function button for receiving calls and MP3 player control.

► **Ord.-No.: 41935**



### HM 500/501 - Headsets

Earphone/microphone with PTT-button on the microphone.

**HM 500**

► **Ord.-No.: 42700**, 2,5/3,5 mm twin plug

**HM 501**

Same like HM 500 - with 2,5 mm single plug.

► **Ord.-No.: 42701**



### Bicycle Set

Bicycle set - microphone/earphone fitting to the bicycle helmet, Walkman connection available, 2,5/3,5 mm plug.

► **Ord.-No.: 41861**



### Minimag 440 Antennas

Mag mount antennas with different connectors. Frequency range 430 - 450 MHz.

Minimag 440 SMA, comes with SMA connector


► **Ord.-No.: 65740**

Minimag 440 SMB, comes with SMB connector

► **Ord.-No.: 65745**

Minimag 440 BNC, comes with BNC connector

► **Ord.-No.: 65750**



Usage sample

Transmitting unit:  
waterproofed IPX 7

### BPA 200 - Adapter

For wireless connection from radio to Bluetooth Headset. Scope of delivery: transceiver, adapter 2,5 mm stereo plug to 2,5/3,5 mm double plug, 230 V wall charger

► **Ord.-No.: 15455**



### BPA 300 BT

Wireless biker-headsets for connect to Bluetooth mobile phones and navigators

**BPA 300 BT/C:** For closed helmets with headset CHS 300. Delivery contents: transmitter, headset CHS 300, 230 V wall charger

► **Ord.-No.: 15500**

**BPA 300 BT/O:** For open helmets with headset OHS 500. Delivery contents: transmitter, headset OHS 500, 230 V wall charger

► **Ord.-No.: 15510**

## Bike communication



### Bike-Sets

Our Bike-Sets consist of a pair of 2-way radios with helmet headsets for the bike to bike communication.

### Tectalk Smart+ Sets

for closed helmets  
2 devices, 2 x CHS 300, 2 x BHS 301  
► **Ord.-No.: 29883.S1**

for open helmets  
2 devices, 2 x OHS 500, 2 x BHS 301  
► **Ord.-No.: 29883.S2**

for closed helmets, incl. charger  
2 devices, charger, rech. batteries,  
2 x headset, 2 x CHS 300, 2 x BHS 301  
► **Ord.-No.: 29884.S1**

for open helmets, incl. charger  
2 devices, charger, rech. batteries,  
2 x headset, 2 x OHS 500, 2 x BHS 301  
► **Ord.-No.: 29884.S2**

### Tectalk Smart XL Sets

for closed helmets, incl. charger  
2 devices, duo-charger, rech. batteries,  
2 x CHS 300, 2 x BHS 301  
► **Ord.-No.: 29888.S1**

for open helmets, incl. charger  
2 devices, duo-charger, rech. batteries,  
2 x OHS 500, 2 x BHS 301  
► **Ord.-No.: 29888.S2**

### Tectalk Contact 2 Sets

for closed helmets  
2 devices, 2 x CHS 300, 2 x BHS 300  
charger, rech. batteries  
► **Ord.-No.: 29740.S1**

for open helmets  
2 devices, 2 x OHS 500, 2 x BHS 300  
charger, rech. batteries  
► **Ord.-No.: 29740.S2**

## Cases for work and hobby

### Tectalk Pro XL

2 devices, 2 x charger, rech. batteries, 2 x headsets MA 24 L  
► **Ord.-No.: AL206.S2**

### Tectalk Contact 2

2 devices, 2 x charger, rech. batteries, 2 x headsets MA 24 L  
► **Ord.-No.: AL206.S3**



## AE 600 Motorbike Intercom

### Motorbike-Intercom AE 600 - The Basic

for driver and co-driver, connectivity  
to navigation systems or MP3 Player

- **Ord.-No.: 40011**, with CHS 300 (closed helmet)
- **Ord.-No.: 40012**, with OHS 500 (open helmet)

### Motorbike-Intercom AE 600 S - The Advanced

for driver and co-driver. With integrated FM radio  
and connectivity to 2-way radio, MP3 Player and GSM.

- **Ord.-No.: 40021**, with CHS 300 (closed helmet)
- **Ord.-No.: 40022**, with OHS 500 (open helmet)

## Connecting cable for 600 series

**BHS 308**: Passenger headset cable for AE 600  
series (loop cable).

- **Ord.-No.: 41952**



## 2-way radio accessories

### Helmet Headsets for Basic Sets



#### Closed helmet Set CHS 300

Microphone/headphones for closed helmets for connection to the basic set BHS 300/301.

► **Ord.-No.: 41930**



#### Open helmet Set OHS 500

Microphone/headphones for open helmets for connection to the basic set BHS 300/301.

► **Ord.-No.: 41955**

### Helmet Stereo Headsets



#### SHS 300

2 headphones for MP3 player connection, incl. adaptor 3,5 mm to 2,5 mm.

► **Ord.-No.: 41929**



#### SHS 300 S Twin Headphones

Comes with 2,5 mm stereo plug and ca. 50 cm cable, for e.g. 2 way radios like MIDLAND 777, ALBRECHT Tectalk Smart, - Tectalk FM+

► **Ord.-No.: 41928**

### Earphones



**OH2/OH2A** With flexible, soft rubber ear loop.

**OH 2A**, 2,5 mm connector

► **Ord.-No.: 71451**

**OH 2**, 3,5 mm connector

► **Ord.-No.: 71450**



#### Earphone

Dynamic mono earphone with 3,5 mm connector for easy fixing on external ear.

► **Ord.-No.: 71410**

#### Earphone OH3/OH3A

With flexible ear loop.

**OH 3A**, 2,5 mm connector

► **Ord.-No.: 71452**

**OH 3**, 3,5 mm connector

► **Ord.-No.: 71453**



#### Helmet earphone

especially for driving schools.

3,5 mm connector

► **Ord.-No.: 41886**

2,5 mm connector

► **Ord.-No.: 41887**



### AL 400 - Windbreak

Spare foam for MA 30, AE 30/37 microphones

► **Ord.-No.: AL 400**

## 2-way radio accessories

### Basic Sets for Bikes



#### BHS 300 N

For TT ActionPro, Contact2, TT Pro XL. Transmission button and plug for the 2-way radio (2.5/3.5mm twin plug). You will need the arphone/microphone CHS 300 (closed helmet) or OHS 500 (open helmet)

► **Ord.-No.: 41940**

#### BHS 300 U

Same like BHS 300 but with universal bike cable for use with PTT button. For radios with duo plug 2.5/3.5 mm like Alan, Midland, Albrecht and other 2-way radios.

► **Ord.-No.: 41939**

#### BHS 301 N

Same like BHS 300 N but with stereo plug 2.5 mm e.g. for Tectalk FM+/-smart, MIDLAND 777/K1, G5

► **Ord.-No.: 41941**

#### BHS 300 K

Same like BHS 300 but with Kenwood connector for e.g. MIDLAND G11 and G14.

► **Ord.-No.: 41942**

### Microphones



#### baby monitoring microphone BM 1

Microphone for baby monitoring for almost all 2-way radios, 2.5 mm stereo plug, incl. 1.5 m cable

► **Ord.-No.: 41870**



#### Speaker microphone SM 400

With clip and helix cable. Connector: 2.5/3.5 mm

► **Ord.-No.: 41780**



#### Speaker microphone SM 500

A mini sized and powerful condenser-style microphone that produces excellent transmitted audio clarity. A 360 degree revolving stainless clip on the back can be secured to the user's lapel or shoulder. This unit is made to meet IP-54. Connector: 2.5/3.5 mm.

► **Ord.-No.: 41750**

### Adapter



Dual plug 2.5/3.5 mm on 2.5 mm stereo plug. Adapter for various headphones on Tectalk smart+/FM+, ALAN 777/K1, MIDLAND G5.

► **Ord.-No.: 29254**

### Which accessory for which 2-way radio?

#### Double connector 2,5/3,5 mm:

e.g. for Tectalk Pro XL, Tectalk Contact 2

#### Connector (Stereo) 2,5 mm:

e.g. for Tectalk Smart+, Tectalk FM+

#### Adapter: Double- to Stereo connector (Best.-Nr.: 29254)

e.g. for Tectalk Smart+, Tectalk FM+



### Accessories



#### EXT 300 - Extension cord

For AE 500S/600/600S, BHS 300/301, SHS 300

► **Ord.-No.: 41947**



#### Vox adapter

For basic set BHS 300/301. For Vox use. Not for Tectalk smart+.

► **Ord.-No.: 41883**



### Car-cig. plug charger

For Tectalk FM+/Smart+/Contact2 ► **Ord.-No.: 29251**

For AE 600/AE 600 S/AE 600BT ► **Ord.-No.: 29724**

For Tectalk Pro XL ► **Ord.-No.: 29799**

For Tectalk action, ALAN 441/443, ALAN 445 Sport, MIDLAND G7/G6/445BT, Reer 5000/5003/5005

Marine Transceiver: MIDLAND Ocean and Atlantic

► **Ord.-No.: 29726**



For the connection of any stereo earphone (e.g. common MP3 Player headsets) to PMR radios (PMR 446) with 3.5 mm or 2.5 mm speaker socket. This is an ideal solution for driving schools, so every student can use his own earphone.

► 3,5 mm connector, **Ord.-No.: 41961**

► 2,5 mm connector, **Ord.-No.: 41962**






# Tourist Radio

## The individual communication system that satisfies your needs.






You can combine your ideal tourist set for your individual groups from the above mentioned components. The basic set would be the ATT100 tourist transmitter for the tour guide and GHS01-headset as well as minimum one ATR100 Set (code: 29900.S2) which includes a pair. The travel bag (code: 29912) is laid out for a maximum of 12 pcs. ATR100.








### Set ATR Advanced Tourist Receiver (Ord.-No. 29900.S2) includes:

				
2 pcs. ATR 100 Advanced Tourist Receiver	2 pcs. THS01 Tourist-Headset with hygienic, wipeable plastic surface	1 pcs. Y-cable, charges two devices simultaneously	1 pcs. wall charger	2 pcs. lanyards






### Set ATT Advanced Tourist Transmitter (Ord.-No. 29902) includes:

				
1 pcs. ATT100 Advanced Tourist Transmitter	1 pcs USB-Charging cable	1 pcs. wall charger	1 pcs. battery (1400 mAh)	1 pcs. lanyard an 1 pcs. Clip

### Optional Accessories

				
GHS01 Guide Headset, (ATT100) Ord.-No.: 29907	Spare battery for ATT 100 Ord.-No.: 29924	USB-Charging cable for ATT100 Ord.-No.: 29911	Y-ATR01, Y-cable, charges two ATR 100 simultaneously, Ord.-No.: 29905	<b>NEW!</b> USB-Charging cable charges six ATR 100 simultaneously, Ord.-No.: 29930

### Optional Accessories

				
Transport bag for 12 units and accessory Ord.-No. 29912	Adapter Micro-USB to 3.5 mm Ord.-No.: 29910	THS01 Tourist-Headset Ord.-No.: 29908	CH-ATR01 wall charger for ATT100/ATR100 Ord.-No.: 29904	Lanyard for ATR100 / ATT100 Ord.-No.: 9150



## > Scanner

With Albrecht scanners and scanner radios you are close to the action. Since the release of scanners, Albrecht has built up a wide selection of models, satisfying beginners as well as professionals. Our policy: we want to offer you high-value scanners at affordable low prices, perfectly

engineered and good quality guaranteed! Although the use of scanners has been liberated in numerous European countries, operators of scanners have to pay attention to the considerable differences in national jurisdiction that still prevail.

MHz	Radio service	
26.565	27.405	CB-radio
34	40	Mobile radio 8 m Band (commercial radio, remote controls, wireless microphones)
47	68.4	TV frequencies Band I
50	54.4	Ham Radio 6 m Band
68	87.5	Mobile radio 4 m Band (commercial radio, police radio)
87.5	108	FM broadcast
108	118	Civil Air Navigation Band
118	136	Civil Air band
136	137.5	Weather Satellites
136	144	Military 2 m Band
144	146	Ham Radio 2 m Band
146	174	Mobile radio 2 m Band (commercial radio, police radio, maritime radio)
174	230	TV frequencies Band III
230	400	Military Air Band
410	425	Mobile radio (trunked radio)
430	440	Ham Radio 70 cm Band
433.075	434.775	Low power devices (LPD)
440	470	Mobile radio 70 cm Band (commercial radio, railway radio, Pager)
446.0	446.1	Private mobile radio (PMR 446)
470	790	UHF-TV Band IV and V
890	960	Public Mobile Radio GSM
1240	1300	Ham Radio 23 cm Band

Please note that in Germany it is not allowed to listen on every mentioned frequency band.



## Handheld scanner

### > ALBRECHT AE 30 H

A handheld scanner with 200 channels, pocket size, especially for air band and FM radio. The switchable bands allow easy frequency change in European countries. Furthermore, this scanner disposes 3 priority channels (1 channel/band), 3 pre-programmed search bands, delay function 0 - 5 sec., lock-out function max. 40 frequencies, key lock, illuminated LC-display indicating channel, frequency and function, 400 mW audio output. Connections for antenna (BNC), ear plugs and external loudspeaker. Supplied with: rubber antenna and belt clip.

► **Ord.-No.:** 27030



### > ALBRECHT AE 33 H

This small and compact handheld scanner receives the complete bandwidth of FM-radio in 50kHz steps. It is equipped with many advanced functions for professional users.

- 9 pre programmed service bands:
  - 78 - 87,295 MHz: VHF-low (Emergency)
  - 87,3 - 107,95 MHz: FM radio (50 kHz steps)
  - 108 - 137 MHz: Airband (AM)
  - 137 - 174 MHz: 2 m Band (Amateur radio, Freenet, Commercial radio, Marine)
  - 406 - 512 MHz: UHF (Amateur radio, PMR, Commercial radio, Religious radio)
- 2 selectable country band plans
- Frequency steps: 5/6,25/8,33/10/12,5/20 with 15 Offset/50 kHz
- 180 programmable channels
- 3 Instant Channels
- Memory scan: 30 channels/sec
- Scan delay: 2 sec
- Memory for channel lockout: 40
- Connectors: Antenna (BNC), Stereo earphone (3,5 mm plug)
- Battery indicator
- Key lock
- Illuminated LC-Display
- Power supply: 3 x AA alkaline/ NiMH batteries
- Scope of delivery: Alkaline batteries, Belt clip, Rubber antenna, Stereo earphone
- Dimensions: H: 10,4 x W: 5,3 x D: 2,8 cm
- Weight: 100 g

► **Ord.-No.:** 27033



### > ALBRECHT AE 69-2H

A 80 channel scanner, compact design, only 165 g, with 3 band groups, non-volatile memory for settings (EEPROM), hyper search with 180 steps/sec., priority channel, delay function 2 sec., channel skip, illuminated LC-display. Socket for antenna (BNC), earplug/loudspeaker.

**New:** now with DC-/charging socket. Supplied with rubber antenna and belt clip.

► **Ord.-No.:** 27069



## > ALBRECHT AE 75 H

- ▶ Frequency ranges: 25 - 88 MHz, Airband 108 - 137, 137 - 174 MHz, 400 - 512 MHz.
- ▶ Steps 5 / 6,25 / 10 / 12,5 / 20 kHz
- ▶ Airband frequency steps 8,33 / 12,5 kHz switchable
- ▶ Close Call
- ▶ 7 preprogrammed search bands Emergency, Freenet, PMR, Marine, Air, CB, Ham
- ▶ Memory scan 100 channels / sec. (Scan)
- ▶ Frequency scan 100 channels / sec. (Search)
- ▶ 300 memory positions in 10 banks
- ▶ Illuminated LC-display
- ▶ Non-volatile memory for settings (EEPROM)
- ▶ Jack for earphone/loudspeaker (3,5 mm)
- ▶ Power supply: 2 x AA rechargeable batteries or Alkaline batteries
- ▶ Dimensions :  
B: 67 mm/H: 115 mm/ T: 33 mm
- ▶ Weight: 169 g without batteries and antenna
- ▶ Supplied with: rubber antenna, belt clip, rechargeable batteries , USB cable
- ▶ **Ord.-No.:** 27075



## > ALBRECHT AE 125 H

- ▶ Frequency ranges: 25 - 88 MHz, Airband 108 - 137, 137 - 174 MHz, 225 - 400 MHz, 400 - 512 MHz., **806 - 960 MHz**
- ▶ Steps 5 / 6,25 / 10 / 12,5 / 20 kHz
- ▶ Airband frequency steps 8,33 / 12,5 kHz switchable
- ▶ illuminated LCD Matrix display
- ▶ CTCSS and DCS squelch modes
- ▶ Close Call
- ▶ 7 preprogrammed search bands Emergency, Freenet, PMR, Marine, Air, CB, Ham
- ▶ Memory scan 100 channels/sec.
- ▶ Assign individual name tags to channels
- ▶ Frequency scan 100 channels/sec.
- ▶ 500 memory positions in 10 banks
- ▶ EEPROM
- ▶ Jack for earphone/loudspeaker (3,5 mm)
- ▶ Power supply: 2 x AA rechargeable batteries or Alkaline batteries
- ▶ Dimensions :  
B: 67 mm/ H: 115 mm/ T: 33 mm
- ▶ Weight: 205 g without batteries
- ▶ Supplied with: rubber antenna, wall charger, belt clip, rechargeable batteries , USB cable
- ▶ **Ord.-No.:** 27125



## > ALBRECHT AE 92 H

Like the AE 72 H, this handheld scanner also disposes of 10 preprogrammed search bands and even 13 frequency ranges. Frequency range: 25 - 960 MHz. In the airband area the frequency steps are adjustable from 12,5 kHz to 8,33 kHz. The quick scan (50 channels/sec., frequency search 60 steps/sec.) and hyper search with 180 steps/sec. make searches of information a pleasure. Frequencies can be memorized in 200 memory locations and of course, this scanner as well disposes all usual features, such as battery indicator, key lock, delay function, connections for antenna and much more. **Supplied with:** battery/wall charger.

- ▶ **Ord.-No.:** 27092



### Specifications

Model	AE 30 H	AE 33 H	AE 69-2H	AE 75 H	AE 125 H	AE 92 H	AE 230 H	AE 355 M
Memory locations	200	180	80	300	500	100/200	bis zu 2500 dyn.	300
Frequency ranges	87,5 - 107,9 MHz UKW/FM 108 - 137 MHz AM 137 - 174 MHz FM	78 - 87,295 MHz 87,3 - 107,95 MHz 108 - 137 MHz AM 137 - 174 MHz 406 - 512 MHz	25 - 88 MHz 137 - 174 MHz 406 - 512 MHz	25 - 88 MHz 108 - 137 MHz 137 - 174 MHz 400 - 512 MHz	25 - 88 MHz 108 - 137 MHz 137 - 174 MHz 225 - 400 MHz 400 - 512 MHz 806 - 960 MHz	AE 72 H: 25 - 512 MHz uncontinuous AE 92 H: 25 - 512 MHz 25 - 960 MHz uncontinuous	u.a. 25 - 87,3 MHz, 108 - 137 MHz, 137 - 174 MHz, 400 - 512 MHz, 806 - 960 MHz, 1240 - 1300 MHz	25 - 87,3 MHz, 108 - 137 MHz, 137 - 174 MHz, 300 - 512 MHz, 806-960 MHz
Scanning speed	25 channels/sec.	30 channels/sec.	50 channels/sec.	100 channels/sec.	100 channels/sec.	50 channels/sec.	100 channels/sec.	180 channels/sec.
Frequency steps	5/6,25/8,33/10/12,5/15/20/25/50/100 kHz	5/6,25/8,33/10/12,5/20 kHz	5/6,25/10/12,5/20 kHz	5/6,25/8,33/10/12,5/20 kHz	5/6,25/8,33/10/12,5/20 kHz	5/6,25/8,33/10/12,5/20 kHz	5/6,25/8,33/10/12,5/15/20/25/50/100 kHz	5/6,25/8,33/10/12,5/20 kHz
Power supply	3 batteries (AA)	3 batteries (AA)	2 batteries (AA)	2 batteries (AA)	2 batteries (AA)	included	included	included
Dimensions W x H x D	50 x 105 x 27 mm	104 x 53 x 28 mm	65 x 150 x 40 mm	67 x 115 x 33 mm	67 x 115 x 33 mm	65 x 150 x 40 mm	68 x 115 x 31,5 mm	132 x 142 x 42 mm
Weight incl. antenna	130 g	100 g	182 g	200 g	205 g	190 g	180 g	640 g
Order No.	27030	27033	27069	27075	27125	27092	27230	27055



## Handheld scanner

### Racingscanner

#### > ALBRECHT AE 230 H

- ▶ Racing frequencies
  - ▶ Airband frequencies
  - ▶ Voice radio frequencies (25 - 1300 MHz)
  - ▶ Racing frequencies preprogrammed
  - ▶ Max. 2500 assigned memory locations
  - ▶ Close Call function
  - ▶ Internet update available
- ▶ 18 (19) Frequency ranges include: VHF-low: 25 - 87.3 MHz, Airband 108 - 137 MHz, VHF-high: 137 - 174 MHz, UHF: 400 - 512 MHz, 806-960 MHz, 1240-1300 MHz
  - ▶ Close Call™ nearby radio transmission search & capture up to 960 MHz
  - ▶ 18 (19) Frequency ranges
  - ▶ 50 CTCSS/104 DCS codes detection
  - ▶ Memory scan 100 channels/sec. (Scan)
  - ▶ Frequency scan up to 300 steps/sec. (Search)
  - ▶ Up to 2500 dynamically assigned memory locations
  - ▶ Airband steps 8.33 and 12.5 kHz selectable
  - ▶ Frequency steps: 5/6.25/7.5/10/12.5/15/20/25/50/100 kHz
  - ▶ 200 search and Close-Call lockout memory locations
  - ▶ 10 user programmable search bands
  - ▶ 1 Service search range ▶ Scanning delay: 0 - 5 sec.
  - ▶ Non-volatile memory for settings (EEPROM)
  - ▶ Connectors for: Headphone (8 - 64 Ohms)  
Power supply/Wall charger 230 V AC to 6 V DC, 500 mA, Antenna (BNC), PC + Cloning cable (4 pin mini)
  - ▶ Internal power supply: 2 x AA rechargeable batteries or Alkaline batteries
  - ▶ Dimensions: L: 68 mm x H: 115 mm x D: 31,5 mm
  - ▶ Weight: 180 g



#### Supplied with:

AE 230 H incl. headphone, 2 rubber antennas (different frequency ranges), belt clip, 2 rechargeable batteries (2 x AA NiMH 1800 mAh), wall charger/power adaptor 230 V AC carrying strip, RS 232 connecting cable for PC programming

▶ **Ord.-No.:** 27230

#### Optional accessories:

ARC230 - programming software for the AE 230 for easy programming and controlling of the scanner.

▶ **Ord.-No.:** 27235



## Mobile scanner

#### > ALBRECHT AE 355 M

This new mobile radio scanner comes with an adjusted German frequency band plan, 7 preset frequency banks (EMG, FRN/PMR, Air/Marine, CB AM/10 m FM), 300 frequency memories, a scan speed of 180 channels/sec, channel and frequency search as well as time display and much more. The frequency steps Auto, 5 kHz, 6.25 kHz, 8.33 kHz (Air), 10 kHz, 12.5 kHz, 20 kHz with offset (4 m band) are switchable and the ultra-fast close range scan with a range of approx. 100 m and the skip function round off the comfort. It goes without saying that this mobile scanner is also equipped with all other popular features, such as battery indicator, keypad lock, search delay, antenna connectors and much more.

23 frequency bands: CB, 10m, 4 m, air, weather, 2 m amateur radio, 2m private mobile radio, marine radio lower band/ upper band, UHF private mobile radio and 900 MHz

▶ **Ord.-No.:** 27055



## Scanner Accessories

### Adapter for Handheld Scanner



Switchable 12 Volt adapter for handheld scanner:  
AE 69-2H, AE 72, AE 82 H,  
AE 92, AE 230  
► **Ord.-No.: 73751**

### Wall adapter for Handheld Scanner



Wall adapter with polarity switch for use with handheld scanner:  
AE 69 H, AE 72 H, AE 92 H, AE 230 H  
AE 55 H, AE 65 H, AE 67 H, AE 82 H,  
AE 105 H, AE 600 H  
► **Ord.-No.: 73671**

### Window clip mount



Window clip mount for use with antennas with BNC connector. Comes with 2,5 m RG 174/U coaxial cable and mounted BNC plug. Optimum suitable for Ham radio, scanner and CB-transceiver.  
► **Ord.-No.: 6676**

### Flexible earphone



**OH-2**  
Flexible, dynamic mono earphone with 3,5 mm connector for easy fixing on ear.  
► **Ord.-No.: 71450**

### Universal mobile holder



Universal mobil holder for use with handheld scanner and transceiver. Easy mounting on a car's vent grille.  
► **Ord.-No.: 75205**

### Mini mag mount BNC



Very strong mini magnet mount (Ø 35 mm). With BNC female mount for rubber and short telescopic antennas. Comes with 2,4 m low loss RG 174 cable with mounted BNC male connector.  
► **Ord.-No.: 6677**

### Magnetic mount antenna

#### Miniscan

Minimagnet antenna mount for scanner, Ham radio. Comes with 2,7 m RG 174 cable with BNC plug.

Frequency range:  
0,5 - 2060 MHz (RX),  
145 - 435 MHz (TX)  
Power rating: max 40/25 W  
Length: 32 cm  
Connector: BNC

► **Ord.-No.: 6158**



### AE Handscan



Telescopic scanner antenna with very good receiving capability which can be used as a receiving antenna, as well as amateur (2 m/70 cm) band transmitting antenna.

Frequency range:  
25 - 1300 MHz  
Length: 66 cm  
Connector: BNC

► **Ord.-No.: 6157**

### AE Maxiscan



Flexible wideband scanner antenna with very good receiving results in the 4 m and 2 m band. With BNC connector.

Frequency range: 25 - 1300 MHz  
Length: 32 cm

► **Ord.-No.: 6156**

### Sky Scan Mag 1300



Mobil magnet scanner antenna for 25 - 1300 MHz. Length about 60 cm. Comes with cable and BNC connector.

► **Ord.-No.: 61680**


## Scanner Accessories



### Multiscan DX

The ideal space-saving scanner antenna that can be installed in any place such as attic, balcony etc. Comes with mounting set and PL/SO-239 terminal.  
Frequency range: 60 - 525 MHz


► **Ord.-No.: 6167**



### Eurostick DX

Wide band scanner antenna with 3 radials. Can be installed in any place such as attic, balcony etc. Comes with mounting set and PL/SO 239 terminal.  
Frequency range: 25 - 2060 MHz

► **Ord.-No.: 6164**



### Sky Band

A discone scanner antenna which can be used as a receiving antenna as well as amateur band transmitting antenna. The radiators are made of stainless. For mounting mast of max. 35 mm diameter.

► **Ord.-Nr.: 6161**



### AE Desktop 1300

Baseantenna for 25 - 1300 MHz. Very compact so ideal for home or balcony use. Length about 1,1 m radials 8 x 20 cm. Comes with cable and BNC plug.

► **Ord.-Nr.: 61690**



### Allband

High performance discone antenna which can be used as a receiving antenna as well as for transmission use on several ham radio frequencies. Made of stainless steel, chromed brass and eloxed aluminium. Easy to install; comes with So-239 connector.

**Frequency range:** RX 25 - 1300 MHz  
TX 49 - 51, 120 - 180 MHz,  
215 - 300 MHz (UHF)  
**Power rating:** 200 W UHF, 300 W (VHF)  
**Length:** 170 cm  
**Connection:** SO 239

**This antenna is suitable to transmit and receive on all stated frequencies. Suitable for all scanners and radios.**

► **Ord.-No.: 61700**

Specifications						
	Multiscan DX	Eurostick DX	Sky Scan Mag 1300	Sky Band	AE Desktop Mag 1300	Allband
Frequency range MHz	60 - 525	25 - 2060 TX 144/440/ 900/1290	25 - 1300	RX 25 - 1300	25 - 1300 72-144, 220-400, 900-1290	25 - 1300
Power rating				max. 200 W		max. 300 W CB 200 W VHF/UHF
Length	100 cm	120 cm	64 cm	74 cm	101 cm	170 cm
Ord.-No.	6167	6164	61680	61680	61690	61700



## > CB-Radio

On the road again...

Do you travel across Europe? On the road? You want to communicate with others? You want to get the latest news about the road-condition by other CB users?



In some German states (Bavaria, North Rhine-Westphalia and Saxony) a **CB radio warning system for construction sites** has been established for accident prevention on German highways. A transmitter, the core part of the system, sends repetitiously recorded voice warnings within the range of 300 m of the construction area to enhance alertness of approaching drivers about the danger of the coming scene. The message „Attention Construction Site“ can be broadcasted on different channels in

seven different languages. Statistics state that 75% of all trucks have a CB mobile radio aboard. Polish trucks amount to 96% while in Germany registered trucks make up 65%.

All ALBRECHT and MIDLAND CB mobile radios can receive these warning messages.



### **Albrecht - Leading in new ideas:**

Albrecht has consequently applied the European R&TTE directive and its possibilities, which has replaced the former national approval mark systems by the European CE marking system. All Albrecht Multi-Standard CB radios have a country switch system and can be used in most European countries in (minimum) one of the 3 or more available switch positions: It depends on the member state's frequency application, which of the country switch position(s) you may use in the region where you are: 40 CH FM everywhere and in some countries, which do not yet allow AM or SSB, 40 FM/40 AM/40 SSB in nearly all countries (the EN 300 433 Standard) and 80/12 (covering the additional German channels 41 to 80 inside of Germany except base station use in defined border regions).

### **My hobby CB-Radio**

Some Restrictions apply on use of the 80 German channels: channel numbers 41 to 80 may unfortunately not be used everywhere: in the border areas of the neighbouring countries, apart from the Czech Republic: Base stations are not allowed to transmit in border regions on these channels, or you need a special licence of the German authority (BNetzA).

### **Using your radio set in other countries**

Even with the common CE marking, there are still some special national requirements in a few countries. Manufacturers have been obliged to inform users clearly by statements on the gift box and in the user manual about regional restrictions to use CB radio. Albrecht has issued a unique „Radio Passport“ which will always provide you with the latest relevant information with your CB radio. The „Radio Passport“ can be downloaded at any time from the Albrecht homepage as a real help in police controls to show that your radio is legal. Users are responsible to have an official licence, where necessary (see country list in the user manuals) and to use only the allowed channel combinations in multi-standard radios.

### **New CB regulation:**

**Now the high power mode is permitted in Germany as well as all other EU member states and most CEPT countries in the future:**

FM (4 Watts), AM (4 Watts) and SSB (12 Watts) as well in all EU member states and most CEPT countries in future. All Albrecht CB radios are prepared to meet the new standard's higher output power levels and the radios can be switched to the new limits as soon as they will be published.

## CB Radio incl. SSB/Amateur Radio

### > ALBRECHT AE 7500

The new CB Radio AE 7500 a full multichannel SSB CB transceiver.

The AE 7500 is already pre-equipped with the higher transmission power for the new European standard: **4 Watt AM and FM, 12 Watt SSB.**

For Radio amateurs with license we offer the AE 7500 as Amateur version.

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W · 40 SSB/12 W
- ▶ **UK and int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W · 40 SSB/12 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W · 40 SSB/12 W



- ▶ **AE 7500** CB version, Ord.No. 12750
- ▶ **AE 7500** HAM version, Ord.No. 35750

#### Specifications

- ▶ Analog S-Meter
- ▶ Last Channel Recall
- ▶ Scan ▶ Direct Access Ch 9/19
- ▶ Dual Watch ▶ Roger Beep
- ▶ 4 Channel Memories
- ▶ All Mode Talkback
- ▶ MIC/RF Gain Control
- ▶ Tone control ▶ Variable TX Power
- ▶ ANL and NB
- ▶ 500 Hz Tuning Steps plus Clarifier
- ▶ PA Function (optional horn speaker required)
- ▶ Dimension 272 x 199 x 60 mm
- ▶ Easily convertible for Amateur Radio
- ▶ 10 steps S - and PWR Meter
- ▶ 5 programmable memory channels
- ▶ Menu functions: Beep, Roger Beep, Transmit,

## CB portable radio incl. SSB

### > ALBRECHT AE 5890 EU

The new mobile radio AE 5890 EU - our first full multichannel SSB CB transceiver is a complete new development and only optical similar to its predecessor AE 5800. The AE 5890 EU is already pre-equipped with the higher transmission power for the new European standard: **4 Watt AM and FM, 12 Watt SSB.**

Radio amateurs with license are allowed to modify their AE 5890 EU to the 10 M band (28.0000 – 29.7 MHz) with plenty of power: 10 Watt AM, 30 Watt FM, 30 Watt SSB!

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W · 40 SSB/12 W
- ▶ **UK and int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W · 40 SSB/12 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W · 40 SSB/12 W

#### Specifications

- ▶ Up/down Scan and Memo Scan
- ▶ LCD with frequency/channel indication
- ▶ RF- and Mic-Gain via software keys
- ▶ Dual Watch, CH 9 and CH 19 switching
- ▶ Separate knobs for Volume, Squelch and Clarifier
- ▶ Adjustable power
- ▶ 10 steps S - and PWR Meter
- ▶ 5 programmable memory channels
- ▶ Menu functions: Beep, Roger Beep, Transmit, Time-out-timer, 7 illumination colors
- ▶ 6 pin Mic socket, powerful speaker socket
- ▶ SHIFT and RPT functions for amateur radio use



- ▶ **AE 5890 CB Version:** Ord.-No.: 12589
- ▶ **AE 5890 Amateur Version:** Ord.-No.: 35589
- ▶ **AE 5890 DIN bracket:** Ord.-No.: 75440

7 illumination Display-Color options



## CB mobile radio

### > ALBRECHT AE 6891

Detachable front section with bracket for dashboard mounting

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **UK and int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ 5 Country switching by software operation
- ▶ Channels selectable by UP/DN keys on the unit and microphone
- ▶ Big graphic LC display (47 x 20 mm) for channel, S- and power meter, frequency and status icons
- ▶ Channel/frequency display selectable
- ▶ RF gain switch for local/DX operation (LOC)
- ▶ Die cast back panel with heat sink (for longer QSOs)
- ▶ AM-FM switch
- ▶ 3 memory channels
- ▶ Scan functions for all channels (SC) or special channel dual watch (DW)
- ▶ Channel 9 direct key
- ▶ Key tones on/off
- ▶ Flash-EEPROM memory for last setting
- ▶ Remote cable length about 2 meters



We grant you 3 years manufacturer's warranty.



▶ **AE 6891** Ord.-No.: 12691

#### Different specifications AE 6790 and AE 6891

	AE 6790	AE 6891
ASQ Auto Squelch		X
3 channel memory	X	
4 channel memory		X
Dimmer		X
Channel selection knob		X
Up/Down channel selection button	X	X
Microfon sensitivity switchable		X
Roger Beep		AM/FM
Tone squelch		X

## CB mobile radio

### > ALBRECHT AE 6790

Detachable front section with bracket for dashboard mounting

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **UK and int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ 5 Country switching by software operation
- ▶ Channels selectable by UP/DN keys on the unit and microphone
- ▶ Big graphic LC display (47 x 20 mm) for channel, S- and power meter, frequency and status icons
- ▶ Channel/frequency display selectable
- ▶ RF gain switch for local/DX operation (LOC)
- ▶ Die cast back panel with heat sink (for longer QSOs)
- ▶ AM-FM switch
- ▶ 3 memory channels
- ▶ Scan functions for all channels (SC) or special channel dual watch (DW)



▶ **AE 6790** Ord.-No.: 12679



We grant you 3 years manufacturer's warranty.

- ▶ Channel 9 direct key
- ▶ Key tones on/off
- ▶ Flash-EEPROM memory for last setting
- ▶ Remote cable length about 2 meters

## CB mobile radio incl. CTCSS

### > ALBRECHT AE 6690

**Tone squelch (pilot tone or CTCSS) is a new function in CB radio communication.**

This tone squelch replaces the conventional squelch, which reacts on a weaker noise or an increasing field strength. Instead there is an inaudible deep tone in every transmission. This tone will be interpreted by the partner station if this station also is equipped with this function.

The loudspeaker will only turn on, if the device „hears“ this tone. So you can build an own group with your friends and colleagues and everybody in this group can listen to the other ones.

With activated TSQ the normal squelch is not activated. The radio has the ability to decode the CTCSS codes always in the best sensitivity and does not react to any noises or external signal without CTCSS.

- ▶ Theoretically there are 48 user groups on each channel possible.
- ▶ The first 38 tones are internationally standardised, the codes from 39 to 48 are additionally possible with other AE 6690 at the distant partner stations only.

CTCSS codes are often also described as Sub Channels or Pilot Tone system. This function is also ideal for CB gateways!

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **UK and int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

## CB mobile radio

### > ALBRECHT AE 5090 XL

AE 5090 XL mobil CB Transceiver with 5 country settings! Outside EU and R&TTE extendable to 400 channels, max. 10 W.

Clear and well arranged front panel, as well as excellent display. It is easy to use with rugged controls and large keys. This fantastic mobile cb-radio is the perfect companion for the frequent traveller, who won't go for second-best. Micro-processor driven with highly sensitive RX, this mobile cb-radio can also be used at home.

#### Country Codes

- ▶ **D old:** 80 FM/4W · 40 AM/1 W
- ▶ **EU old.:** 40 FM/4 W · 40 AM/1 W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ Display color selectable: red or blue ▶ Displaycolor double-stage (dimmer) ▶ ASC Noise Suppression (patent by GPE) now adjustable, separate from squelch settings! ▶ RF- and Mic Gain ▶ Channel memory by EEPROM ▶ Scan Functions ▶ DW (Dual Watch) ▶ Dimmer ▶ Channel selection by rotary knob and up-/down buttons at microphone ▶ Up-/Down-Scan ▶



#### 3 Display-Color options

- ▶ Blue backlight ▶ Red backlight
- ▶ Blue backlight in RX mode and red backlight in TX mode

▶ **AE 6690** Ord.-No.: 12669.4

▶ **AE 6690 Set with DIN bracket**

**Ord.-No.: 12669.S2**

#### Specifications

- ▶ Special channel (SCH), 3 memory channels
- ▶ Scan functions for all channels (SC) or special channel dual watch (SW)
- ▶ Channel 9 direct key
- ▶ Key tones and Roger beep selectable
- ▶ Time-out-Timer for transmission limitation
- ▶ Automatic Squelch ASQ and manual squelch SQ
- ▶ Channel / frequency display selectable
- ▶ Flash-EEPROM memory for last setting
- ▶ Outside EU and R&TTE extendable to 240 channels



▶ **AE 5890:** Ord.-No.: 12295

▶ **AE 5090 XL Set with DIN bracket:** Ord.-No.: 12295.S1

Memo Scan ▶ 5 programmable memory channels, separately for AM and FM ▶ Multifunction LC display with S-Meter, Modulation-/Power-Meter, status- and channel display ▶ 6-pin Mic connector - usable for up/down mics or Packet radio modems ▶ External S-Meter socket ▶ Up-/Down-Scan ▶ Memo scan external speaker socket ▶ Detachable DC power cable

## CB mobile radio

### > ALBRECHT AE 6490/AE 6491

Europe CB radios with front speaker and DIN-size mobile mounting bracket.

The latest generation of CB transceivers with wide angle LCD guarantees legibility from every perspective. The three watt front speaker provides a clear sound.

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **UK und int.:** 40 FM/4W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specification

- ▶ Wide angle graphic LCD display for channel, S- and power meter, frequency and status icons
- ▶ AM-FM switch
- ▶ 6 pin microphone socket on the front panel
- ▶ 5 memory channels
- ▶ Scan functions for memory channels
- ▶ Channel 9/19 direct key
- ▶ Key tones and Roger beep selectable
- ▶ Automatic squelch ASQ and manual squelch SQ
- ▶ Channel/frequency displayed simultaneously
- ▶ Channel selection with rotary switch
- ▶ Electret microphone with up/down/ASQ buttons
- ▶ 50 Ohms antenna PL connector
- ▶ External speaker socket (3.5 mm)
- ▶ Flash-EEPROM memory for last setting
- ▶ 2 colors selectable for LCD backlighting
- ▶ Dimmer for LCD backlighting
- ▶ Front speaker



- ▶ **AE 6490 - 12 Volt,** Ord.-No.: 12649-4
- ▶ **AE 6491 - with automatic voltage adaption for 12 and 24 Volt** Ord.-No.: 12648
- ▶ **DIN bracket:** Ord.-No.: 75495

## CB mobile radio

### > ALBRECHT AE 5290 XL

Our popular CB radio AE 5290 comes completely new as the XL version.

New backlight, new black front panel and new country switching.

#### Country Codes


- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ Outside EU and R&TTE extendable to 240 channels, max. 10 W
- ▶ Channel selection by rotary knob and up/down buttons at microphone
- ▶ 5 programmable memory channels
- ▶ memo scan
- ▶ LC display with s-meter
- ▶ power-meter
- ▶ status- and channel display
- ▶ 6 pin mic connector
- ▶ external s-meter and speaker socket
- ▶ Detachable DC power cable
- ▶ Dimensions: L: 14, D: 19, H: 4 cm
- ▶ Weight: 830 g



- ▶ **AE 5290** Ord.-No.: 12590
- ▶ **AE 5290 Set with DIN bracket** Ord.-No.: 12590.S1



#### 3 Display-Color options

- ▶ Blue backlight ▶ Red backlight
- ▶ Blue backlight in RX mode and red backlight in TX mode



## CB mobile radio

### > ALBRECHT AE 6199

This new compact CB-radio possesses all necessary functions. Equipped with ASQ automatic squelch you do not have to adjust the annoying noise limiter.

The wide angle LC display allows you to install the unit in the upper or lower part of the driver's cab. In both positions the readability of the display is very good.

- ▶ **Automatic Squelch ASQ**
- ▶ **Wide angle graphic LC Display**
- ▶ **3 colours for LCD backlighting**

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ AM/FM Switch
- ▶ Automatic Squelch ASQ
- ▶ Wide angle graphic LC Display
- ▶ 3 colours for LCD backlighting
- ▶ Scan and CH 9/19 direct key
- ▶ Flash: memory for last settings
- ▶ 6 pin microphone socket
- ▶ Connections for external loudspeaker (3,5 mm)
- ▶ Measurements W x D x H: 130 x 190 x 35 mm
- ▶ Weight: 800 g



- ▶ **AE 6199** Ord.-No.: 12699
- ▶ **AE 6199 Set with DIN bracket** Ord.-No.: 12699.S1 or 12699.S2



## CB mobile radio

### > ALBRECHT AE 6190 HD-X

This Albrecht CB Radio AE 6190 HD-X, developed and manufactured in accordance with the latest CB regulations, offers you:

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ Channel selection UP/Down buttons on the radio and at the microphone
- ▶ Channel scan button at radio
- ▶ Direct channel switching to CH 9 at radio
- ▶ LC display for channels and status
- ▶ 6-pin standard microphone socket, suitable also for amplifier microphones, selective calling systems or Packet Radio modems/TNC's
- ▶ Socket for external loudspeaker

#### Your AE 6190 HD comes with the following accessories:

- ▶ Mobile mount
- ▶ Fixed connected DC power cable with looped-in fuse
- ▶ Electret hand-held microphone with pre-amplifier and up/down buttons
- ▶ Microphone hanger
- ▶ Various screws to fasten the radio and microphone fixing devices
- ▶ User manual with Radio Passport



- ▶ **AE 6190 HD-X** Ord.-No.: 12619.4
- ▶ **AE 6190 HD-X Set with DIN bracket** Ord.-No.: 12619.S1



#### New HD-X version:

- ▶ Flash memory for last settings
- ▶ country switching for new regulations
- ▶ Illumination by LED
- ▶ Top AM modulation



We grant you 3 years manufacturer's warranty

## CB mobile radio

### > ALBRECHT AE 4200 ASQ



Our well known AE 4200 in a reduced version with red LED display and without CH 9/19 or scan function.

A CB-Radio for all, simple to use. The large display is easy-to-read. The radio provides separate volume and on/off power switch and fine adjustable squelch control. TX/RX and FM indicator, 4-pin mic socket at the front, speaker socket at the back.

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W
- ▶ **EC:** 40 FM/4 W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W

#### Specifications

- ▶ Squelch and ASQ
- ▶ EEPROM
- ▶ Large display
- ▶ Emergency channel 9 switch
- ▶ Channel memory
- ▶ Dimensions: 130 x 35 x 170 mm
- ▶ Weight: 700 g



- ▶ **AE 4200 ASQ** Ord.-No.: 12012
- ▶ **AE 4200 ASQ with DIN bracket** Ord.-No.: 12012.S1



## CB/SSB Portable Transceiver

### > ALBRECHT AE 2990 AFS



#### Features:

#### Country Codes

- ▶ **D new:** 80 FM/4W · 40 AM/4 W · 40 SSB/4 W
- ▶ **EU old.:** 40 FM/4 W · 40 AM/1 W · 40 SSB/4 W
- ▶ **UK and international:** 40 FM/4W
- ▶ **E new:** 40 FM/4 W · 40 AM/4 W · 40 SSB/4 W
- ▶ **Po:** 40 FM/4 W · 40 AM/4 W · 40 SSB/4 W

#### Specifications

- ▶ Selectable Hi/LOW Power: Low power output mode will give the user significantly longer battery life.
- ▶ CH 9/19
- ▶ Lock: The Lock feature allows the user to ▶LOCK▶ all of the button
- ▶ SQ setting: Adjusts the squelch setting (memorized with bar graph)
- ▶ RF-Gain: Allows optimizing the incoming signal
- ▶ Battery Case: Slide on battery case, which contain 9 ▶AA▶ batteries (not included)
- ▶ CB approved according to the European norm EN 300 433-2 and EN 300 135-2
- ▶ Ham radio version will be available (AM/FM/SSB 4W)
- ▶ Dimensions: L: 40 cm (excl. antenna 18,4 cm), W: 6,5 cm, D: 3,2 cm
- ▶ Weight: 300 g

- ▶ **AE 2990 AFS** Ord.-No.: 10190



## Optional accessories

### Mobile set

Connecting cable with PL antenna socket for external mobile antenna and 12 V power adapter + lighter plug ▶ Ord.-no.: 10108



### Empty battery pack

For 9 AA NiCd batteries with combined jack for power supply and charging function.

- ▶ Ord.-no.: 10103

### Desktop charger

Automatic desktop charger

- ▶ Ord.-no.: 10106



### 12 V Cig. lighter cable

Power supply cable with 2 A fuse and control LED, lengt: 2,30 m.

- ▶ Ord.-no.: 7575



### 24 V Cig. lighter cable

1200 mAh/DC/DC converter, 12/24 V.

- ▶ Ord.-no.: 73751



### SM 500

Speaker microphone with L-plug, rotating clip, water proof (IP54)

- ▶ Ord.-no.: 41750



## Accessories

### DIN size mobile mounting bracket

DIN size mobile mounting bracket.  
Fits into most car radio installation slot.



For AE 5090, AE 5800, AE 485 W, AE 5890  
and AE 5090 XL

► **Ord.-No.: 75440**



► For AE 5290 and AE 5290 XL

**Ord.-No.: 75450, black**  
**Ord.-No.: 75451, silver**



For AE 4200 MC, AE 4200 R

► **Ord.-No.: 75480**



### Hyflex CL 27 BNC

High flexible BNC fiberglass antenna e.g. for AE 2990 AFS, MIDLAND 42 Multi with very good transmitting/reception results.  
Power rating max. 50 W,  
length 54 cm.

► **Ord.-No.: 6577**

TNC connection

► **Ord.-No.: 6578**

### Slip-on rubber antenna



Flexible slip-on rubber antenna, useful for all handheld CB's with telescopic antennas like AE 2100 with a diameter of 10 mm, frequency range: 27 MHz, length: 25 cm.

► **Ord.-No.: 6580**

### Cig.-lighter plug



Cigarette lighter plug,  
simple type.


► **Ord.-No.: 7570**

### DC static converter MW 292



Car charger cable, 12/24 Volt

► **Ord.-No.: 73751**



NC B 302  
oval 2- pin

► **Ord.-No.: 5812**



NC B 303  
3- pin, with 2  
cables e.g. AE 5090

► **Ord.-No.: 5813**

### DC cable

For AE 5800 and AE 485 W

► **Ord.-No.: 58195**



For AE 6690/6890/6891/6790/6490/6491

► **Ord. No. 58169**

# Function list

EQUIPMENT	MOBIL RADIOS										HANDHELD RADIO	
	AE 7500	AE 5890 EU	AE 6891	AE 6790	AE 6690	AE 5090 XL	AE 6490/ AE 6491	AE 5290 XL	AE 6199	AE 6190 HD-X	AE 4200 R	AE 2990 AFS
Channel selection (rotary button = DK, Up/Down= U/D)	DK	DK	DK	DK	DK	DK	UD	DK	UD	U/D	U/D	U/D
Up/Down-Microphone inclusive	X	X	X	X	X	X	X	X		X		
Audio output (W/Ω)	6/4	6/4	4/8	4/8	4/8	3/8	3/8	3/8	3/8	4/8	3/8	0,5/8
Scan (U/D= Up/Down)	X	X	X	X	X	X	X	X	X	X		X
Number of memories	4	5	4	3	3	5	5	5				5
Memo-Scan (U/D= Up/Down)	X	5	X	X	X	5	X	X				X
Dual Watch	X	X	X	X	X	X						X
Direct channel access	9/19	9/19	9/19	9/19	9/19	9/19	9/19	9/19	9/19	9/19		9/19
Display (LED/LCD)	LCD	LCD	LCD	LCD	LCD	LCD	LCD	LCD	LCD	LCD	LED	LCD
S-Meter	10	10	8	8	9	5	10	5				9
Adjustable mic-gain	software	software	high/low	high/low	high/low	X						X
Adjustable RF-gain	software	software	loc/DX	loc/DX	loc/DX	X						X
Albrecht Super Squelch (ASC) <small>(patent by GfE)/ASQ</small>	ASQ		ASQ	ASQ	ASQ	ASC	ASQ		ASQ			
S-meter socket		2,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm		2,5 mm				
Speaker socket	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm	3,5 mm
Microphone socket	6 pin	6 pin	6 pin	6 pin	6 pin	6 pin	6 pin	6 pin	6 pin	4 pin	4 pin	2,5 mm
12 V DC supply	X	X	X	X	X	X	X	X	X	X	X	X
Characteristics	<b>SSB</b> , Display color change-over, Roger Beep, Echo, Noise Blanker	<b>SSB</b> , Display color change-over	Removable display, wide angle-display	Removable display, wide angle-display	CTCSS, wide angle-display	Display color change-over	Display color change-over, dimmable	Display color change-over, wide angle-display	Wide angle-display	Wide angle-display	wide angle-display	Handheld radio
Dimensions (W x H x D)	20/6/75	24,5/55/55	14/45/53	14/45/53	14/14,5/4	15/19/55	18/15/5	14/19/4	14/13/4	14/14,5/4	13/19/35	7/4,5/18
Weight g	1800	1300	980	980	870	1060	1027	830	700	820	800	280
Country standard	D new, UK E, Po	D new, UK EC, E, Po	D new, UK EC, E, Po	D new, UK EC, E, Po	D new, UK EC, E, Po	D old, EU, EC, Po, E	D new, EC, Po, E, UK	D new, EC, Po, E	D new, EC, Po, E, UK	D new, EC, E, Po	D new, EC, E, Po	D new, EU old, Po, E new, EU
Order No.	12750	12859	12691	12679	12669,4	12295	12648,4 12648	12590	12699	12619,4	12010,4	10190

## Country standards - channels - power - frequency range

Country standards	D old	D new	EU old	EC	Po	E new	UK
Channels FM/AM/SSB*	80/40/40	80/40/40	40/40/40	40 FM	40/40/40	40/40/40	40 FM (UK)/40 int.
Power	4/1/4 W	4/4/12 W	4/1/4 W	4W	4/4/12 W	4/4/12 W	4 W
Frequency range (MHz)	26,565-27,405	26,565-27,405	26,965-27,405	26,965-27,405	26,960-27,400	26,965-27,405	27,60125-27,99125

\*SSB only with AE 5890 EU and AE 7500




## ➤ Ham Radio

### A short abstract of history.

Amateur radio (►Ham Radio►) is an officially allocated radio communications service, open (almost) worldwide to amateur radio enthusiasts if they have taken an appropriate examination and have obtained an amateur radio licence from their telecommunications authority. The amateur radio examination is necessary because it even gives you the right to build your own radio sets or to modify purchased equipment for your own purposes without needing any approval for it. Restrictions for industrially produced sets occur only from the EMC and R&TTE directive of the EU (ready-made sets must show a certain minimum of EMC-safety in accordance with EN-Standards), for the other technical parameters such as compliance with permitted amateur radio frequency ranges and transmitting power each radio amateur is responsible himself. Certainly there are also EU countries which require restricted frequency ranges on VHF/UHF on amateur radio sets for sale in the trade such as Austria, France and Spain. Even if many amateur radio sets have a wider frequency in Germany, radio amateurs are only allowed to operate on the frequencies made available to them, apart from specific possible emergency situations. Amateur radio sets must definitely not be used for other purposes even if this would technically be possible.

### Information obtainable from

DARC Deutscher Amateur-Radio-Club e.V.  
Lindenallee 6  
34225 Baunatal  
Fax: 0561 9 49 88-61  
e-mail address: [info@darc.de](mailto:info@darc.de)  
From DARC you can also find out about the licence class 3 and obtain the forms for the licence examination.

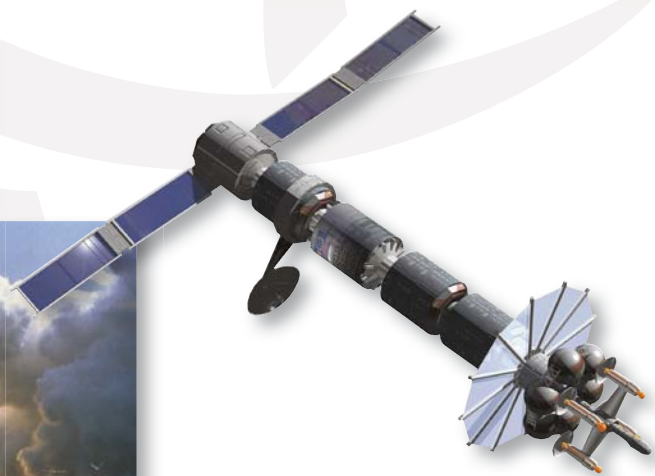

## Handheld Ham Radio transceiver

### Dual-Band Ham Radio

#### > ALBRECHT DB 275

A 2 m/70 cm UHF/VHF handheld ham radio with dual frequency, dual display and dual standby working modes.

##### Specifications:

- ▶ Frequency ranges 136-174 MHz & 400-470 MHz (ranges can be limited by PC programming)
- ▶ Simultaneous display of both bands
- ▶ Wire clone function (optional connecting cable necessary)
- ▶ Programmable by computer (optional programming set)
- ▶ Standard „Kenwood“ style headset duo plug wiring system (2,5 mm for speaker/3,5 mm for microphone/PTT with 12 mm gap between the sockets)
- ▶ 99 + 1 call / emergency channel memories
- ▶ VOX function
- ▶ Background display illumination
- ▶ High/Low power selection 5 / 1 W VHF, 4 / 1 W UHF
- ▶ Wide/Narrow bandwidth selection (25KHz/12.5KHz)
- ▶ Channel / frequency display modes
- ▶ 104 groups DCS codes / 50 groups CTCSS codes
- ▶ Repeater operation with selectable OFFSET & +/- shift up to 69.9 MHz
- ▶ 1750 Hz tone burst for European repeater access
- ▶ Busy Channel Lockout (selectable)
- ▶ Transmit Over Timer (selectable)
- ▶ Step 5K/6.25K/10K/12.5K/25K for 2 way communication, 100 kHz for Wideband Broadcast Radio Receiving
- ▶ Keyboard lock (Auto/Manual)
- ▶ Multiple scan modes
- ▶ ANI code transmission & display ( automatic number ID code transmission & display)
- ▶ DTMF code transmission with manually selectable transmission length possible
- ▶ Humidity protected plastic covered headset-sockets ▶ PTT button
- ▶ Monitor button (squelch open), switching to FM Broadcast Radio Listening
- ▶ DTMF/Call/1750 Hz button

▶ **DB 275** Ord.-No.: 36275



##### Optional accessories

Headset MA 21-LK  
▶ Ord.-No.: C709.04



Microphon MA 22 K  
▶ Ord.-No.: C844



Batteriepack, 1200 mAh  
▶ Ord.-No.: 36276

Programmingcable DB 275  
▶ Ord.-No.: 36277

Earphone DB 275  
▶ Ord.-No.: 71449

Desktopcharger  
▶ Ord.-No.: 36278



### Dual-Band Ham Radio

#### > ALBRECHT DB 271

**Model with accessory sockets for the ALBRECHT/MIDLAND Standard Duo-plug (2,5 mm for microphone/3,5 mm for speakers with 10 mm gap between the sockets).**

Dual-Band, Dual-Display, Dual-Frequency and Dual-standby  
A/B key : switch Band A or Band B  
TDR key: switch dual or single band  
Digital FM radio function  
Automatic tuning and storing (20 max.) also with frequency display.  
You can select from 76 - 108MHz, almost covers all radio stations in the world.

##### Specifications

- ▶ Dual Frequency, Dual Display and Dual Standby
- ▶ VHF&UHF, UHF&UHF or VHF&VHF working modes
- ▶ Frequency Range: 136 - 174MHz, 400 - 470MHz, 136 - 174MHz, 245MHz, 136 - 174MHz, 450 - 520MHz
- ▶ Bright flashlight illumination function ▶ Voice prompt (Chinese/English)
- ▶ 128 memory channels ▶ VOX function ▶ High/low power selection
- ▶ Digital FM radio (automatic tuning and storing, radio frequency display)
- ▶ Low-voltage voice prompt ▶ Wide/narrow bandwidth selection (25KHz/12.5KHz)
- ▶ Channel name edit and display ▶ 105 groups DCS/50 groups CTCSS
- ▶ Stopwatch function ▶ Busy channel lockout ▶ Transmit over timer
- ▶ Step (5K/6.25K/10K/12.5K/25K/50K/100K ▶ Multiple scan modes
- ▶ Keyboard lock (Auto/Manual) ▶ Wire clone function
- ▶ Programmable by computer
- ▶ Dimension W/H/D: 58 x 105 x 38 (mm) ▶ Weight 250 g

##### Optional accessories

Car adapter for desktopcharger  
▶ Ord.-no.: C981

Adapter  
▶ 12 Volt, Ord.-no.: 35279

Programmingcable  
▶ Ord.-no.: 35280

▶ **DB 271** Ord.-No.: 35271

## Ham Radio accessories



### MGA 108 - 550

1/4 wave antenna whip made out of stainless steel. Comes with stainless steel spring. Supplied with cutting chart for frequency setting. To be mounted on a DV base.

SWR:	<1,2
Frequency:	108 - 550 MHz
Bandwidth at V.S.W.R. 2:1:	16 MHz at 140 MHz
V.S.W.R. at res freq.:	< 1,4:1 at 140 MHz
Max Power:	100 W
Height (approx.):	670 mm

► **Ord.-No.: 6239**



### SMA 47/135 Dual Band

5/8 wave open coil whip made out of stainless steel. Supplied with cutting chart for frequency setting. To be mounted on a DV base.

Gewinn/Gain:	1,5 dB
SWR:	<1,2
Frequency:	135 - 175 MHz turnable
	46.5 - 61.5 MHz
V.S.W.R. at res freq.:	< 1,2:1 at 140 MHz
Max Power:	100 W
Height (approx.):	1505 mm

► **Ord.-No.: 6237**



### Dualband antenna

140 - 150 MHz/430 - 440 MHz, Length 53 cm

► **Ord.-No.: 62381**



### MGA 108 - 550 DV-S

1/4 wave antenna whip made out of stainless steel. Comes with stainless steel spring. Supplied with cutting chart for frequency setting. Incl. DV-S mount and 5 m cable.

Frequency:	108-550 MHz
Typ:	1/4 Lambda
Max. Power:	100 W
Antenna whip (cm):	70,5cm
Antenna whip:	Stainless steel
Specials:	Stainless steel spring

► **Ord.-No.: 6245**



### Miniscan

Minimagnet mount scanner, Ham radio antenna. Comes with 2,7 m RG 174 cable with BNC plug.

Frequency range:	0,5 - 2060 MHz (receipt/RX), 145 - 435 MHz (send/TX)
Powerrat:	max 50/25 W
Length:	32 cm

► **Ord.-No.: 6158**



### DV-S antenna mount

DV-S-antenna mount, flat type. Installation hole 13 mm.

► **Ord.-No.: 67800**

## Microphones



### DMC 2

High quality dynamic microphone with 4 pin connector for use with various transceivers.

Wiring:

- |               |           |
|---------------|-----------|
| 1. Audio/AF   | 3. PTT RX |
| 2. Ground/GND | 4. PTT TX |

► **Ord.-No.: 41991**

### Densei EC 2002



High quality echo microphone.

Impedance: 3000 Ohm  
 Sensitivity: -62±3 dB  
 Frequency response: 150 Hz - 3500 Hz  
 Weight: 225 g  
 Dimensions: 100 x 68 mm  
 Microphon: Omni-directional electret condenser  
 Power supply: 9 V Batterie

► **Ord.-No.: 4215**

### AE 4197



Original electret replacement microphone with Up/Down channel exchange controls for use with ALBRECHT transceivers, comes with 6 pin microphone plug.

► **Ord.-No.: 4197**

### DMC 520 -6/-4



#### DMC 520-6

High quality dynamic microphone in a classical design complete with 6 pin microphone plug as per ALBRECHT/GDCH standard.

► **Ord.-No.: 41966**

#### DMC 520-4

Same as above but with 4 pin microphone plug (AE 4200 as well).

► **Ord.-No.: 41964**

## Replacement microphones



Replacement microphone with electret capsule and 4 pin connector for AE 4200R and AE 4200 ASQ

► **Ord.-No.: 41982**

Replacement microphone with electret capsule and 6 pin connector for AE 6199

► **Ord.-No.: 41983**

Replacement microphone for AE 4200 MC with CH 9/19 and scan button and 6 pin connector.

► **Ord.-No.: 41976**



Replacement microphone for AE 6190/6690/6890 and other CB radios with 6 pin connector.

► **Ord.-No.: 41978**



Replacement microphone for AE 6490/6491

► **Ord.-No.: 41979**

## ALBRECHT SM 500 speaker mike



#### Speaker microphone

This lightweight, mini sized microphone is designed for light duty applications. Each unit features a powerful speaker as well as a high quality condenser-style microphone element that produces excellent transmitted audio clarity. A 360 degree revolving stainless clip on the back of the microphone can be secured to the user's lapel or shoulder. This unit is made to meet IP-54. Connector: 2.5/3.5 mm

► **Ord.-No.: 41750**

## ALBRECHT SM 400 speaker mike



A loudspeaker microphone with clip and helix cable.

► **Ord.-No.: 41780**



Specifications					
Microphone	Densei EC 2002	DMC 520 -6/-4	DMC 2	AE 4197	SM 400/500
Sensitivity	1 mV/μbar	0,3 mV/μbar	0,3 mV/μbar	2 mV/μbar	2 mV/μbar
Max. output level	ca. 100 mV	30 mV	30 mV	200 mV	200 mV
Frequency range	150 - 3000 Hz	300 - 7000 Hz	200 - 5000 Hz	100 - 8000 Hz	100 - 7000 Hz
cartridge	electret	dynamically	dynamically	electret	electret
power supply	9V battery			Microphone connector	Microphone connector
Ord.-No.	4215	41966/41964 41965	41991	4197	41780/41750

## Microphone spiral cable



6-pin mic cord, spiral type,  
length:1,50 m


► **Ord.-No.: 7620**

6-pin mic cord, spiral type,  
length 2,80 m.

► **Ord.-No.: 7621**


## Albrecht Mike connectors

Solder-side 6 pin microphone  
connector



1 = Audio/Modulation  
2 = PTT-RX (receiver)/  
Packet Radio Decoder.  
3 = PTT-TX (Sender)  
4 = Up/Down  
5 = Ground  
6 = 10 - 15 V

Solder-side 4 pin microphone  
connector



1 = Mic  
2 = Ground  
3 = RX  
4 = TX

## Cable extension



**Microphone cable extension**  
ca. 2 m, 6-pin

► **Ord.-No.: 7625**



**Front section cable extension**  
ca. 2,5 m for AE 6890/6891/6790

► **Ord.-No.: 5820**

## Microphone mounting plate



Screw type

► **Ord.-No.: 7560**



Magnetic and screw type

► **Ord.-No.: 7550**

## Speaker

### CB 20/905



High quality extension speaker with switchable noise filter and mute function. Very good voice reproduction. Incl. mounting set and cable with 3.5 mm plug.

frequency range: 250 - 8000 Hz  
Impedance: 8 Ohm  
power: 7 W

► **Ord.-No.: 7120**

### CB 250



Solid extension speaker complete with mounting set, cable and 3.5 mm plug. The big sized speaker cone enables a high efficiency together with clear voice reproduction.

Frequency range: 200 - 7000 Hz  
Impedance: 8 Ohm  
Power rating: 7 W

► **Ord.-No.: 7117**

### CB 150



Softline extension speaker complete with mounting accessories, cable and 3.5 mm plug. Due to its mylar cone the speaker can be also be used in humid area.

Frequency range: 300 - 7000 Hz  
Impedance: 8 Ohm  
Power rating: 5 W

► **Ord.-No.: 71150**

### CB 45



Extension speaker in classical design, complete with mount, cable and 3.5 mm plug.

Frequency range: 300 - 7000 Hz  
Impedance: 8 Ohm  
Power rating: 5 W

► **Ord.-No.: 7113**

### CB 12



High efficient mini extension speaker with clear voice reproduction. Due to its mylar cone this speaker can be used in areas with high humidity. Incl. mounting accessories, cable and 3.5 mm plug.

Frequency range: 300 - 7000 Hz  
Impedance: 8 Ohm  
Power rating: 5 W

► **Ord.-No.: 7112**

### LS 30

**NEW!**



Moisture-proof loudspeaker, ready to connect with 7 m cable

Frequency range: 120 - 18000 Hz  
Power rating: 15/30 W  
Dimensions: 92 x 92 x 92 mm  
Weight: 450 g

► **Ord.-No. : 7150**

Specifications						
Speaker	CB 20	CB 250	CB 150	CB 45	CB 12	LS 30
Frequency range	250 - 8000 Hz	200 - 7000 Hz	300 - 7000 Hz	300 - 7000 Hz	300 - 7000 Hz	120 - 18000 Hz
Impedance	8 Ohm	4 Ohm	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Power	7 Watt	7 Watt	5 Watt	5 Watt	5 Watt	30 Watt
Case dimensions	110x90x35 mm	130x79x56 mm	90x90x55 mm	66x66x54 mm	74x68x28 mm	92x92x92 mm
Ord.-No.	7120	7117	71150	7113	7112	7150

## Power supplies

### SW 35




Switching power supply for CB and other use.

Power input: 220 - 230 V/50 Hz  
Output voltage: 13,8 V  
Output current: max. 3 - 5 A

► Ord.-No.: 47500

### SW 57




Switching power supplies for CB and others. Short circuit protection.

Power input: 220 - 230 V/50 Hz  
Output voltage: 13,8 V  
Output current: max. 5 - 7 A

► Ord.-No.: 47510

### SW 79




Switching power supplies for CB and others.

Power input: 220 - 230 V/50 Hz  
Output voltage: 13,8 V  
Output current: max. 7 - 9 A

► Ord.-No.: 47520

### SW 102



Switching power supplies for CB and others.

Power input: 220 - 230 V/50 Hz  
Output voltage: 13,8 V  
Output current: max. 10 - 12 A

► Ord.-No.: 47530

## Inverter

Inverter provide 230 V to your electrical equipment's anywhere you have 12 or 24 V power available. Ideal for boat, trucks, camping ...

### USB INV 150 W 12/24 V

Mobile power for cars, trucks, boats and camping. The inverter provide 230 V to electrical equipments anywhere with 12 or 24 V power available. Built-in USB port can charge USB devices (like i-pod, cell phone) via the USB charge port, allowing max. portability of electronic accessories

- Ord.-No.: 47871 = 12 Volt
- Ord.-No.: 47870 = 24 Volt



#### Specifications:

Output power:	150 W continue
Output power:	300 W peak
Input voltage range:	10 - 15 V DC (12 V Version)
Input voltage range:	20 - 30 V DC (24 V Version)
USB power output:	DC 5 A, 500 mA
Battery low:	LED
battery low shutdown:	under 9,5/19,5 ± V
Cooling:	cooling ribs
Fuse:	15 A x 1 (12 V), 10 A x 1 (24 V)
Dimensions W/H/D:	94 x 69 x 165 mm
Weight:	520 g

## Inverter

### INV 150 W 12/24 V



Inverter for max. 150 W power, overload control (LED). For single 230 V appliances, like shavers, small TV sets, notebook computers, CD/ DVD player, typical small 230 V appliances with wall adaptors, energy saving lamps.

- ▶ **Ord.-No.: 47860** = 12 Volt
- ▶ **Ord.-No.: 47861** = 24 Volt

### INV 300 S/A 301 M 12/24 V



Inverter for max. 300 W (A301M: 400 W) power, overload control (LED), cooling fan. For single 230 V appliances, portable TV sets, small stereo sets, video recorders, electronic tools and soldering devices, hot melting glue tools, lighting, portable coolers or as 230 V board network in smaller campers or boats.

- ▶ **Ord.-No.: 47862** = 12 Volt
- ▶ **Ord.-No.: 47863** = 24 Volt
- ▶ **Ord.-No.: 47873** = A301 M, 400 Watt/24 Volt

### INV 600 W 12/24 V



Inverter for max. 600 W power, overload control (LED), cooling fan, optical battery indicator. For all electrical appliances with European 2,5 A flat connector, computers and accessories, smaller electric tools, like saws, standard drilling machines, soldering devices, water pumps, fridge or as 230 V board networks in mobile homes.

- ▶ **Ord.-No.: 47867** = 12 Volt
- ▶ **Ord.-No.: 47864** = 24 Volt

### INV 1200 S 24 V



Inverter for max. 1200 W power, overload control (LED), cooling fan, optical battery indicator, 2 outlets for 230 V. For small and medium size electric tools, 230 V appliances up to power classes of vacuum cleaners, hair dryers, coffee machines, fridge and freezers or as 230 V board network in mobile homes or boats.

- ▶ **Ord.-No.: 47872** = 12 Volt
- ▶ **Ord.-No.: 47865** = 24 Volt

**RC 1000** - remote control for: INV 1200 W, 24 V

- ▶ **Ord.-No.: 47866**

Specifications				
Inverter	INV 150 12/24	INV 300 12/24	INV 600 12/24	INV 1200 24/12
Output voltage	150 W constant 300 W surge	300 W constant 350 W (30 Min.) 600 W surge	600 W constant 800 W (30 Min.) 1500 W surge	1200 W constant 1400 W (30 Min.) 2400 W surge
Input voltage	10 - 15 V (12 V version) 20 - 30 V (24 V version)	10 - 15 V (12 V version) 20 - 30 V (24 V version)	10 - 15 V (12 V version) 20 - 30 V (24 V version)	20 - 30 V
Battery loss/overload alarm	LED	LED	LED	LED
Battery shutdown	below 10/20 V	below 10/20 V	below 20 - +0,8 V	below 20 - +0,8 V
Cooling	heat sink	Ventilator over 40° C	Ventilator over 60° C + 5° C	Ventilator over 60° C + 5° C
Fuse	15 A x 1 (12V), 10 A x 1 (24 V)	35 A x 1 (12V), 20 A x 1 (24 V)	20 A x 5 (12V), 20 A x 3 (24 V)	20 A x 5
Dimensions	143 x 73 x 70 mm	194 x 90 x 75 mm	213 x 200 x 70 mm	390 x 210 x 85 mm
Weight	500 g	900 g	2000 g	3900 g
e/CE	e 13/21414 CE	e 13/021559 CE	e 13/021803 CE	e 13/0214133 CE
Ord.-No.	47860/47861	47862/47863	47867/47846	47865/47872

## Converter 24 V DC - 12 V DC



### PV 3S

► Ord.-No.: 47830



### PV 6S

► Ord.-No.: 47831



### PV 12S

► Ord.-No.: 47832



### PV 18S

► Ord.-No.: 47833



### PV 24S

► Ord.-No.: 47834

These products offer a convenient way to operate mass produced 12 V DC equipment such as cell phones, in car entertainment, professional communication and telematics equipment, refrigerators, televisions etc. from the 24Vdc mobile electrical systems found on diesel engined vehicles and vessels.

### A Comprehensive Range

There are 5 products in the range from 3A to 24A in isolated or common earth configurations. They have been optimised for high volume 24 V DC to 12 V DC applications such as on heavy goods vehicles, coaches, buses, construction, forestry and agricultural vehicles, commercial and leisure marine vessels.

### Tamper Proof

There are no ventilation holes to permit stray objects, dust or water droplets to enter the case. There are no external fuses to be tampered with. Fuses will only blow if there is a fault so there is no need to make them accessible.

All voltage converters are enclosed in a rugged aluminium extrusion. The low mass Surface Mount Technology components are also less prone to damage from vibration and shock, further increasing the reliability of the units.

3Amp units are excellent for charging mobile phones, while 6A units suit a variety of mobile radio applications.

Galvanically isolated units are suitable for marine applications and come complete with the green tamperproof label for petrochemical applications.

### Fast Installation

All the units consume an off load current of less than 15mA, which is probably less than the self discharge current of the vehicle's battery. In most cases this can be ignored, speeding the installation by removing the need to fit a remote switch. All products fit onto a 'Click 'n' Fit mounting clip which is fixed in three points allowing it to be mounted on uneven surfaces. It is easy to fit the clip into awkward places and then simply click the unit into position. A red LED indicates when there is output from the converter. This gives reassurance to the installation engineer and speeds fault finding.

#### Product benefits at a glance

- Lifelong warranty
- High performance
- Low heat emissions
- Dust and waterproof
- Excellent installation possibilities
- Compact, sealed cooling unit

### Easy 6 Step Installation Method

1. Find a convenient location away from sun and rain.
2. Using the mounting clip as a template, mark fixing positions.
3. Drill screw holes.
4. Fix bracket using screws provided.
5. Clip voltage converter to mounting bracket.
6. Correctly connect to load.

### Typical Applications

Installations of mobile and cellular radio communications equipment, telemetry systems, refrigeration, televisions etc on trucks, buses, forestry and off road vehicles as well as boats and yachts and a variety of industrial applications. For a wider range of input and output voltages, see the DD Series.

### AlfaTronic converters were installed in following yachts

► Princess ► Sunseeker ► Swan ► Cranchi

### Specifications

Input voltage range:	17 to 32 V DC
Output voltage:	13.6 V DC
Operation temp.:	-25° C to +80° C
Operation humidity:	95 % max., non condensing
Case work:	Aluminium and Polycarbonate. Dust water and impact resistance to IP5-33
Connections:	Five 6.3 mm push-on flat blade connectors (PV35-A)
Power flow display:	Red LED
Over current protection:	Current sensing circuit
Overheat protection:	Temperature sensing circuit
EN standard compliance:	2004/108/EC the general EMC directive 2006/96/EC the automotive directive 93/68/EEC the CE marking directive VIDG5 AES for use on police and fire vehicles
Certifications:	CE- and e marked, FCC class B
Voltage (intermittent):	PV 3S: 3/6 A PV 6S: 6/10 A PV 12S: 12/18 A PV 18S: 18/24 A PV 24S: 24/30 A

## CB-Radio mobil antennas

Super 70 Blue Line

Super 9 Blue Line

Racer 60 M6

Racer 90 M6

Ninja M6



Specifications					
Model	Super 70 blue line	Super 9 blue line	Racer 60 M6	Racer 90 M6	Ninja M6
Type	1/4 Lambda base loaded	1/4 Lambda base loaded	1/2 Lambda	1/2 Lambda	5/8 Lambda
Channels	120	190	90	120	120
Max. power	150 Watt	250 Watt	40 Watt	16 W PEP/40 W	150 Watt
Length	70 cm	155 cm	65 cm	112,5 cm	94 cm
Fibre glass whip					
stainless steel whip	X	X	X	X	X
hole diameter	12,5	12,5	M6		M6
SWR tuneable	X	X	X	X	X
SWR pretuned					
Accessories					
Infos			incl. adapter screws	with M 6 Thread, incl. adapter screws	incl. adapter screws
Ord.-No. Whip only, Ord.-No.	67181	67180	67142	67132	67232


## CB-Radio mobil antennas

DV 27


T 27

T 27 5/8

AF 393



Extrem  
small mount

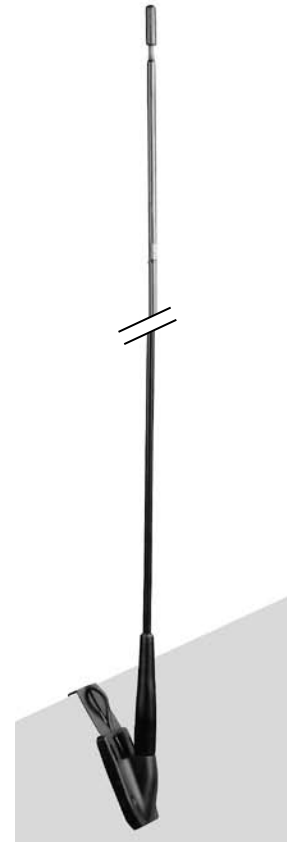

Specifications				
Model	DV 27	T 27	T27 5/8	AF 393
Type	1/4 Lambda	1/4 Lambda	1/4 Lambda	1/4 Lambda
Channels	80	80	80	80
Max. power	80 Watt	150 Watt	50 Watt	10 Watt
Length	150 cm	60 cm	61 cm	65 cm
Fibre glass whip	X	X	X	X
stainless steel whip				
hole diameter	12,5 mm	12,5 mm	12 mm	
SWR tuneable	X	X	X	
SWR pretuned				X
Accessories	DV-mount 4 m cable	DV-mount 4 m cable	DV-mount 4 m cable	3 m cable
Infos				
Ord.-No.	6700	67110	6201	6220
Whip only, Ord.-No.			6202	

## CB-Radio mobil antennas


Racer 60/90

Trucker 14

DV 27 U

High Power 3000

Turbo 2000  
Blue



Specifications						
Model	Racer 60	Racer 90	Trucker 14	DV 27 U	High Power 3000	Turbo 2000 Blue
Type	1/4 Lambda	1/4 Lambda	5/8 Lambda	1/2 Lambda	5/8 Lambda	5/8 Lambda
Channels	150	120	240	130	CB + 10 m	CB + 10 m
Power	100 Watt	100 Watt	500 Watt	150 Watt	1200 Watt	200 Watt
Length	72 cm	115 cm	ca. 150 cm	85 cm	174 cm	145 cm
Fibre glass whip			X			
Stainless steel whip	X	X		X	X	X
Hole diameter	13 mm	13 mm		13 mm		12,5 mm
SWR tuneable	X	X	X	X	X	X
SWR pretuned						
Accessories	DV-mount 4 m cable	DV-mount 4 m cable	mirror mount, 28 m cable, PL259	DV-mount 4 m cable		4 m RG 58
Infos	SWR finetuning by special rings	SWR finetuning by special rings	open coil		27 - 28,5 MHz PL 259 connection	tiltable joint mount, 27-28,5 MHz PL 259 connection
Ord.-No.:	67140	67130	6680	67160		6391
Whip only Ord.-No.	67141	67131			6315	6315



## CB-Radio mobil antennas

GL 27

Gamma II F

AE S9 Plus

Mythos 900 S

Ninja

Especially for  
Trucks and  
Mobile Homes

No grounding  
necessary!



Specifications						
Model	CB-27	Gamma II F	AE S9 Plus	Mythos 900 S	Ninja	
Type	1/4 Lambda	1/4 Lambda	5/8 Lambda	5/8 Lambda	5/8 Lambda	
Channels	120	120	200	200	120	
Max. power	50 Watt	500 Watt	500 Watt	150 Watt	300 Watt	
Length	114 cm	93 cm	150 cm	75 cm	95 cm	
Fibre glass whip	X	X				
Stainless steel whip			X	X	X	
Hole diameter		13 mm	12 mm	12,5 mm	13 mm	
SWR tuneable			X		X	
SWR pretuned	X	X		X		
Accessories	4 m RG 58 cable white	DV-mount 4 m cable	DV-mount 4 m cable	DV-mount 4 m cable	black DV-mount 4 m cable	
Infos	mirror mount	pretuned, no tuning needed		27 - 28,5 MHz PL 259 connector		
Ord.-No.:	6351	6725	6291	67170	67230	
Whip only Ord.-No.						

## CB-Mag mount mobil antennas

Ministar 27

ML 130

ML 145 MAG  
ML 145 PL

CB 95

CBM 108

Mag Star 27


Small and strong!



Specifications						
Model	Ministar 27	ML 130	ML 145/145 PL*	CB 95	CBM 108	Mag Star 27
Type	1/4 Lambda	5/8 Lambda	5/8 Lambda	1/4 Lambda	1/4 Lambda	1/4 Lambda
Channels	80	100	100	80	40	80
Max. power	25 W SSB/10 W FM	300 Watt	200 Watt	100 Watt	30 Watt	50 Watt
Length	31 cm	100 cm	148 cm	112 cm	60 cm	63 cm
Fibre glass whip				X		
Stainless steel whip	X	X	X		X	X
SWR tuneable	X	X	X	X	X	X
SWR pretuned	X					
Accessories	3 m RG 174, PL 259	4 m RG 58	4 m RG 58, PL 259	4 m RG 58, PL 259	3,5 m RG 58, PL 259	4 m RG 58, PL 259
Infos	mag mount, Ø 30 mm	mag mount, Ø 90 mm	mag mount, Ø 120 mm *Stainless steel whip	mag mount, Ø 120 mm	mag mount, Ø 90 mm	mag mount, Ø 100 mm
Ord.-No.	65260	6330	6305	6522	65215	65250
Whip only Ord.-No.:			6310			

## CB-Radio Stationary-Antennas

GPA 27 5/8 and  
GPA 27 1/2



**GP 27 5/8**  
High quality 5/8 wave stationary antenna made of anti-corroding aluminium to extend the performance and stability. Comes with 3 radials (1 m) and mounting set. SWR tunable.

► **Ord.-No.: 63700**

**GP 27 1/2**  
Similar to above, but half-wave version without radials.

► **Ord.-No.: 6348**

Boomerang



1/2 wave stationary-/balcony antenna for mounting on roof or balcony. The aluminium radiator has a length of 300 cm. SWR adjustment by tuning tip on short radiator. Comes with mounting set. SWR: <1,2

► **Ord.-No.: 6350**

New Vector 4000



3/4 wave stationary antenna, CB and 10 m Base station antenna, omnidirectional, tunable by whip length adjustment, high power handling capability, made of aluminium alloy 6063 T-832, UP-GRADE: Lower radiation angle for the best DX, new tuning possibility

► **Ord.-No.: 6340**

Hurricane/  
Storm 27



1/2 wave stationary-/balcony antenna that can be installed in any place like attic, balcony and others. SWR adjustment is not required but the connecting cable should have a length corresponding to instruction manual. Comes with mounting set.

► **Ord.-No.: 63570**

AE 27 - 3,3 / AE 27 - 4,4



► AE 27 - 3,3, **Ord.-No.: 6343**

► AE 27 - 4,4, **Ord.-No.: 6344**



### Features:

- CB stationary antennas
- Directional, High-gain
- Horizontal polarization
- Factory tuned at mid-band
- High power handling capability
- Elements equipped with waterproof jointing sleeve
- Mounting mast: Ø 35-50 mm
- Dimensions (approx.):  
AE 27-3,3: 5740 x 2710 x 100 mm  
AE 27-4,4: 5725 x 4030 x 100 mm

Specifications							
Model	GPA 27 1/2	GPA 27 5/8	Boomerang	New Vector 4000	Hurricane/Storm 27	AE 27 - 3,3	AE 27 - 4,4
Type	1/2 Lambda	5/8 Lambda	1/2 Dipol	3/4 Coaxial J-Pol	1/4 Lambda	3 Element Yagi	4 Element Yagi
Channels	200	200	200	120	100		
Max. power	1000 Watt	1000 Watt	300 Watt	1000 W/shorttime 3000 W	100/300 Watt	1000 Watt	1000 Watt
Length	5,5 m	6,6 m	3 m	8,48 m	ca. 1 m		
SWR pretuned				incl. list	yes		
Bandwidth	26 - 28 MHz	26 - 28 MHz	2000 kHz	1400 kHz	26 - 28 MHz	26.1 - 27.7 MHz	26.1 - 27.7 MHz
SWR min.	1,2	1 : 1,5	1,2	1 : 1,2	1 : 1,5	1.2 : 1	1.2 : 1
Material	Aluminium	Aluminium	Fibre glas/Alu	Aluminium, Steel, Nylon	PVC	Aluminium	Aluminium
Ord.-No.:	6348	63700	6350	6340	63570	6343	6344

## Marine antennas

### AE Marine Masttop 3200



#### AE Masttop 3200

Flexible UKW marine radio antenna for sailing boats - ideal for mast mounting. Length ca. 1 m with stainless steel whip. Comes with 18 m cable and 2 x PL 259 connector

► **Ord.-No.: 64130**



### AE Marine 5/AE Marine 8

#### AE Marine 5

UKW marine radio antenna for motorboats. Ca. 1,6 m fibre glass whip. Antenna mount topple over, white plastic. Comes with ca. 4 m cable and PL 259 connector.

► **Ord.-No.: 64100**

#### AE Marine 8

Same like above, but with 2,4 m fibre glass whip.

► **Ord.-No.: 64120**



### AE 907 Mastholder



For marine radio antennas, recommended for AE Marine 8 antenna.

► **Ord.-No.: 64140**



## Accessories for antennas

### CX 201



**CX 201:** Solid state 2- way antenna switch in heavy diecast quality. Enables to connect two antennas to one transceiver or the other way round. With PL-connectors.

Frequency range: 1,8 - 470 MHz

Insertion loss: 0,2 dB

Max. power input (depends on frequency): 1000 W

► **Ord.-No.: 7401**

### DV cable



#### DV-cable

4 m RG 58 U cable with DV-Right angle connector. with additional PL-Plug.

► **Ord.-No.: 6833**

### Coax cable



High quality Coax cable for hobby or professional use.

#### RG 58

Diameter 4,95 mm,  
Attenuation 10,9 dB/100 m  
(50 MHz)

► **Ord.-No.: 7460/AL 35**

#### RG 58

Same like Ord.-No. 7460, but white color.

► **Ord.-No.: T 200**

#### RG 213

Diameter 10 mm, Attenuation 4,4 dB/100 m (50 MHz)

► **Ord.-No.: 7462**

### Coax inter-cable



#### Coax cable

2 x PL-259/6, Length: 50 cm

► **Ord.-No.: 7580**

#### Coax inter-cable

Length: 150 cm

► **Ord.-No.: 7581**

**Coax inter-cable** - Ideal for use with balcony antennas. Length: 10 m

► **Ord.-No.: 75820**

## SWR-Meter

### CB-Master SWR 20/30

Compact sized SWR meter for a quick measuring and adjustment of CB-antennas. Model SWR 30 with additional RF-power section for a quick reference of the main CB-data.

**Frequency range:** 3,5 - 50 MHz (SWR), 26 - 30 MHz

**(Power) Power SWR:** 1:1 - 1:3

**Impedance:** 50 Ohm

**Deviation:** ±/ - 5 %

**RF output (only SWR 30):** 0 - 10 W

**Dimensions:** 85 x 55 x 30 mm

► **Ord.-No.: 4410** - SWR 20

► **Ord.-No.: 4412** - SWR 30



## Accessories for antennas

### DV antenna mount



DV- antenna mount.  
Installation hole 11 mm.

► **Ord.-No.: 6770**

### DV-S antenna mount



DV-S-antenna mount, flat type.  
Installation hole 13 mm. For use with  
mobil whip Ord.-Nr.: 6190, 6199, 6206  
and 6208.

► **Ord.-No.: 67800**

### NC-570 DV



DV-plug, right angle type

► **Ord.-No.: T 370**

### DV 27 PL



Antenna mount for antenna with  
UHF connection and DV connector  
(e.g. ML145).

► **Ord.-No.: 67771**

### Wing nut



Wing nut and bolt for DV-antennas.

► **Ord.-No.: 6820**

### Anti thief set



Anti thief set for DV antennas with  
special spanner and key bunch.

► **Ord.-No.: 6822**

## Accessories for antennas

### Steel mount



**SP-5:** INOX steel mount for antennas. INOX steel trunk mount, with a double inclination for mobile antennas. The mount is supplied with a hole fixing reducer and a rubber protection for the car body.

► **Ord.-No.: T752**

### Gutter mount



Gutter mount clamp for mobile antennas. Black anodised.

► **Ord.-No.: 6943**

### Mirror bracket



Universal mirror bracket for trucks. Useable for 3/8- or DV mounts.

► **Ord.-No.: 6814**

### Alu mirror mount



Universal mirror mount. Accepts 3/8 or DV mounts. For horizontal or vertical mounting. Very heavy duty type made from Aluminium, silver.

► **Ord.-No.: 6197**

### AM 701 Antenna mount



Antenna mount for 3/8 antennas. Incl. 2,75 m cable

► **Ord.-No.: T795**

3/8 adapter for DV-antennas.

► **Ord.-No.: 6280**



## Accessories for antennas

### Magnetic mount



#### BM 150 DV

Magnetic mount for use with DV antennas, black colour. Comes with cable (length 3,90 m), PL-plug and rubber boot. Diameter 15 cm.

► **Ord.-No.: 6781**

#### BM 150 PL

Same as above, but with PL (SO 239) antenna connector.

► **Ord.-No.: 6782**

#### Replacement rubber boot

► **Ord.-No.: 67821**

### Magnetic mount



#### BM 125 DV

Very strong magnet mount for use with DV-antennas. Comes with 4 m DV cable and PL connector. Diameter 12,5 cm.

► **Ord.-No.: 67840**



### Window clip mount

Window clip mount for use with antennas with BNC connector. Comes with 2,50 m RG 174/U coaxial cable and mounted BNC plug. Optimum suitable for Ham radio, scanners and CB-transceivers.

► **Ord.-No.: 6676**

### Mini magnet mount



Very strong mini magnet mount (dia. Ø 35 mm!). With BNC female mount for rubber and short telescopic antennas. Comes with a 2,40 m low loss RG 174 cable with mounted BNC male connector.

► **Ord.-No.: 6677**



## HF connectors and adapter

NC 551/PL 259



PL male connector for  
RG 213/U/8/U Teflon isolation

► **Ord.-No.:** T 205

NC 551/2/PL 259/6



PL-male connector for  
RG 58/U Teflon isolation

► **Ord.-No.:** T 377

Twin Blister pack

► **Ord.-No.:** 50120

NC 572



PL-connector for RG 58/U  
short type, Teflon type

► **Ord.-No.:** T 292

NC 577/2 PL 259



PL-male connector with  
right angel output

► **Ord.-No.:** 5260

SO 239 SH, NC 554



PL-receptacle for single hole  
mounting rear mounting

► **Ord.-No.:** 5040

NC 554



PL-receptacle with 4-hole flange

► **Ord.-No.:** 5050

NC 553/PL 258



Adapter 2 x PL-female

► **Ord.-No.:** 5060

NC 565



Double PL-female panel mount

► **Ord.-No.:** 5310

NC 558/M 359



L-type adapter PL-male -PL-female

► **Ord.-No.:** 5070

DV-PL Adapter



Adapter PL-connector -  
DV-connector

► **Ord.-No.:** 68027

Dummy L 20



Dummy load with power rating 20  
W/ 60 W short term (interval use),  
PL-connector, max. 500 MHz,  
50 Ohms.

► **Ord.-No.:** 53030

## HF connectors and adapter

BNC 1520/UG 255/U



Adapter BNC-male - UHF-female  
▶ **Ord.-No.: 5158**

BNC 1521/UG 273/U



Adapter PL-male - BNC-female  
▶ **Ord.-No.: 5159**

SMA/BNC



SMA/BNC female  
▶ **Ord.-No.: 58610**

BNC-SMA Adapter



Adapter SMA - BNC-female  
▶ **Ord.-No.: 51640**

NC 1451



N-male connector for RG 58/U  
▶ **Ord.-No.: 5410**

NC 1481



Adapter N-male - BNC-female  
▶ **Ord.-No.: 5424**

NC 1465



Adapter N-male - PL-female  
▶ **Ord.-No.: 5426**

NC 1466



Adapter N-female - PL-male  
▶ **Ord.-No.: 5428**

NC 1453  
for RG 8U / RG 213  
▶ **Ord.-No.: 5411**

BNC/FME



Adapter BNC-male -  
SMA/FME-female  
▶ **Ord.-No.: 5860**

FME-Crimp



FME-crimp connector  
▶ **Ord.-No.: 5850**

PL/FME



Adapter PL -/FME-female  
▶ **Ord.-No.: 5856**

## HF connectors and adapter

### BNC 1505/UG 914/U



Adapter 2 x BNC-female

► **Ord.-No.:** 5152

### BNC 1501



BNC-connector male, for RG 58/U

► **Ord.-No.:** 5150

### BNC 1501/10



BNC-connector male, for RG 8/U; RG 213/U

► **Ord.-No.:** 5163

### BNC 1531/RG 88 UCR



BNC male plug, for RG 58/U, crimp type

► **Ord.-No.:** 5161

### NC 526



Microphone connector socket

► **Ord.-No.:** 5145

### Microphone extension



for AE 6890 and other with 6 pin mike plug/connector, length: 2 m

► **Ord.-No.:** 7625

## Microphone connectors

### Mike chassis plug

Mike chassis plug for single hole mounting

NC 513 3-pin:

► **Ord.-No.:** 5364

NC 515 4-pin:

► **Ord.-No.:** 5140

NC 517 5-pin:

► **Ord.-No.:** 5362

NC 519 6-pin:

► **Ord.-No.:** 5370



### Mike connector

Mike connector with coupling ring

NC 514 4-pin:

► **Ord.-No.:** 5370

NC 516 5-pin:

► **Ord.-No.:** 5361

NC 518 6-pin:

► **Ord.-No.:** 5360

NC 522 8-pin:

► **Ord.-No.:** 5222



## Connector

### Plug

Mono-plug 3,5 mm

► **Ord.-No.:** 5230





#### > Alan Electronics – The Radio Specialist

We are a leading manufacturer of radio equipment for the professional and private sectors. ALBRECHT Radios are sold for more than 30 years in Germany.

In cooperation with the globally active Italian CTE group we design future-oriented projects, which - thanks to in-house development in Germany and Italy - have been successfully established in the market.

We are globally known with our brands ALBRECHT and MIDLAND. Besides radio equipment for hobby and professional users we distribute consumer electronics such as Bluetooth® headsets, digital radios, action cameras and much more.

## Alan Electronics GmbH

Daimlerstraße 1 k · 63303 Dreieich · Germany  
Phone +49-6103-9 48 10 · Fax: +49-6103-94 81 60  
info@alan-electronics.de

Dovenkamp 11 · 22952 Lütjensee · Germany  
Phone +49-4154-84 90 · Fax: +49-4154-84 91 00  
kontakt@alan-electronics.de

[www.alan-electronics.de](http://www.alan-electronics.de)