
Product family datasheet

Starters for single operation at 230 V AC



Product features

- Temperature range for reliable cut-out: -20...+80 °C




Product family datasheet

Technical data


Product description	Electrical data		Dimensions & weight
	Nominal voltage	Nominal wattage	Length
ST 111 LONGLIFE ¹⁾	220...240 V	65.00 W	40.3 mm
ST 171 SAFETY DEOS ²⁾	220...240 V	65.00 W	40.3 mm
ST 173 SAFETY DEOS ²⁾			

¹⁾ Not suitable for L 70 W

²⁾ Temperature range for reliable switch-off: -20...+80 °C

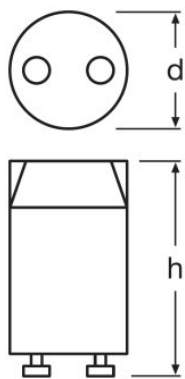

ST 111 LONGLIFE

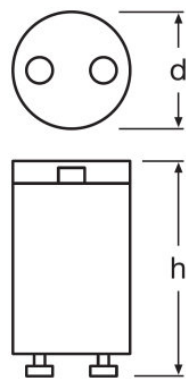

ST 171 SAFETY DEOS, ST 173 SAFETY DEOS

Application advice

For more detailed application information and graphics please see product datasheet.

Product family datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300270166	ST 111 LONGLIFE	Shipping carton box 1200	400 mm x 235 mm x 325 mm	30.55 dm ³	8086.00 g
4050300854045	ST 111 LONGLIFE	Shipping carton box 400	227 mm x 179 mm x 227 mm	9.22 dm ³	2748.83 g
4050300422855	ST 171 SAFETY DEOS	Shipping carton box 1200	400 mm x 265 mm x 325 mm	34.45 dm ³	11169.00 g
4050300854106	ST 171 SAFETY DEOS	Shipping carton box 200	227 mm x 98 mm x 227 mm	5.05 dm ³	2020.00 g
4050300854120	ST 173 SAFETY DEOS	Shipping carton box 200	227 mm x 98 mm x 227 mm	5.05 dm ³	2114.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM GMBH is distribution partner
of LEDVANCE for Digital Lighting
Systems and Components

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany