



LV HRC FUSE LINK GL/GG WITH INSULATED GRIP LUGS WITH COMBINATION INDICATOR SIZE 000, 50A, AC 500V/DC 250V

Similar to image

#### Technical data:

<b>Current / for AC / rated value</b>	A	50
<b>Operating class of the fuse link</b>		gG
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		NH000
<b>Supply voltage</b>		
• for AC / rated value	V	500
• for DC	V	250
<b>Switching capacity current</b>		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
<b>Design of an identification indicator</b>		Combination alarms
<b>Ambient temperature</b>		
• minimum	°C	-5
• maximum	°C	40

#### Certificates/approvals:

**General Product Approval****Declaration of  
Conformity****Test Certificates**

CSA



KEMA



[ROSTEST](#)

VDE

[Manufacturer](#)[Manufacturer](#)**Shipping Approval**

GL

**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/mall>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3NA6820/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA6820](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA6820)**CAX-Online-Generator**<http://www.siemens.com/cax>

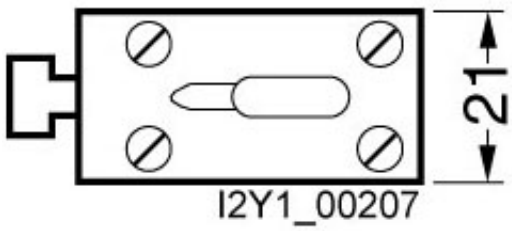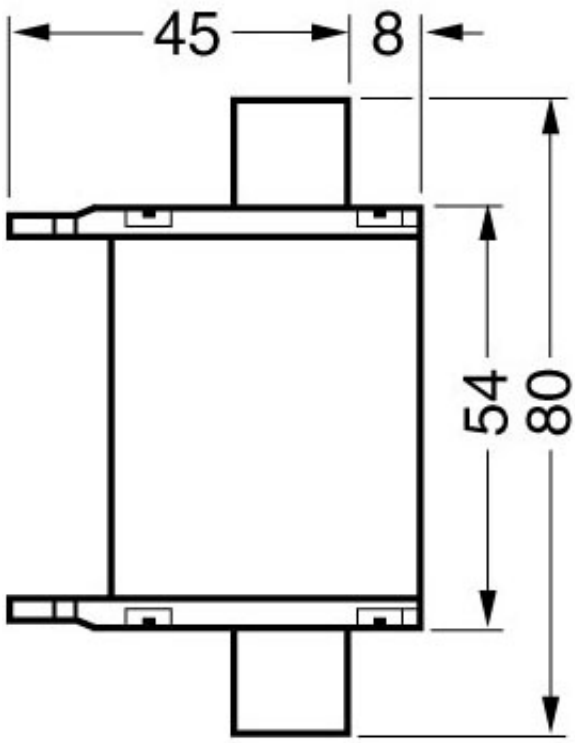

last change:

Aug 26, 2011