


1	2	3	4	5	6	7	8	9	10	11	12	13	14
<b>Artikel-Nr. / Item No.</b>		<b>Beschreibung / Description</b>			<b>Länge / Length</b>		<b>Kabelaufbau / Cable structure</b>						
64658		DAT USB-C/C v2.0 90° 0,5m textil sw/si PL			500 ± 30 mm		5C * 0.59 m #24 * 2C + #30 * 3C + AB; shielding 64/0.06						
64659		DAT USB-C/C v2.0 90° 1,0m textil sw/si PL			1000 ± 30 mm		5C * 1.09 m #24 * 2C + #30 * 3C + AB; shielding 64/0.06						
64660		DAT USB-C/C v2.0 90° 2,0m textil sw/si PL			2000 ± 30 mm		5C * 2.09 m #24 * 2C + #30 * 3C + AB; shielding 64/0.08						

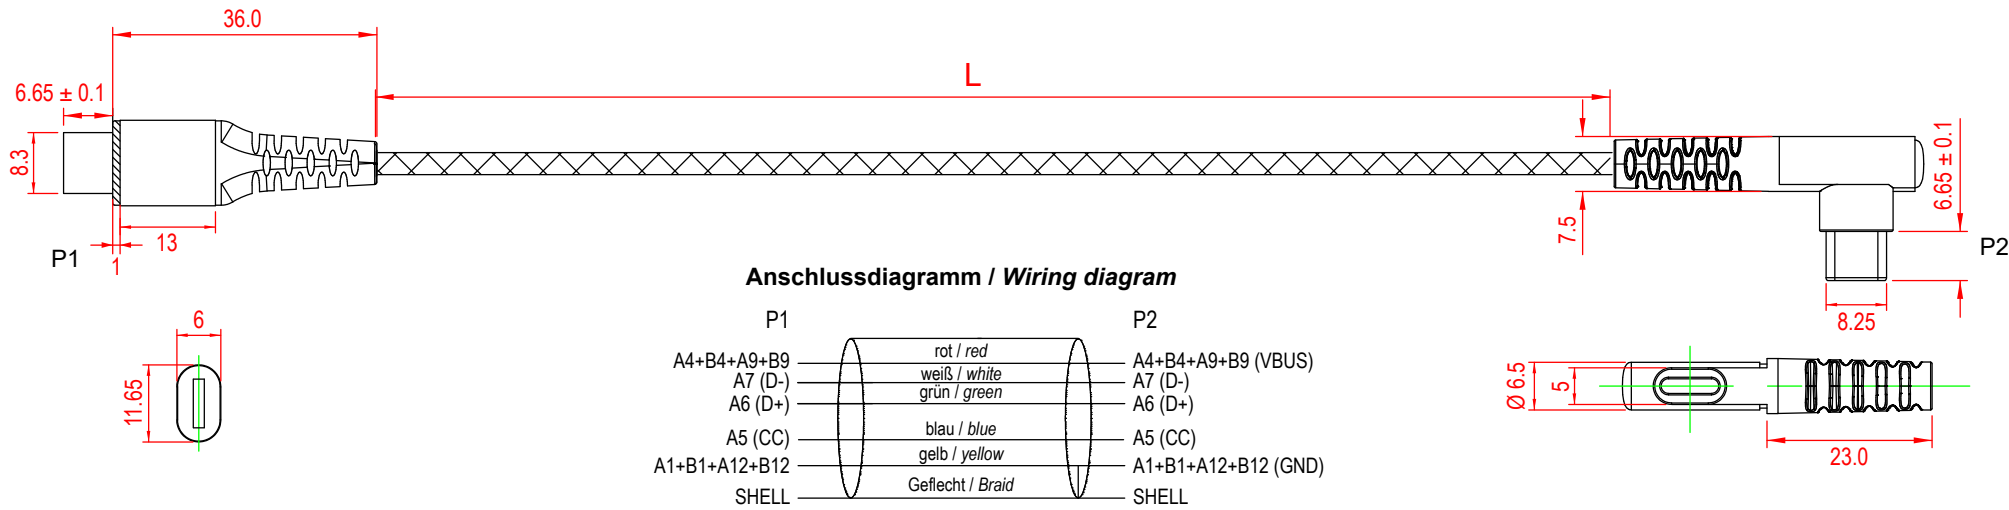

**USB-C™-auf-USB-C™-Textilkabel mit Metallsteckern (spacegrau/silber), 90°**

- ermöglicht schnelles Laden mit maximal 60 W (20 V, 3,0 A)
- gewinkelter Stecker vermeidet Kabelbruch
- mit Knickschutz (auf über 10.000 Biegezyklen ausgelegt)

Anschlüsse: 2x USB-C™-Stecker  
 Max. Übertragungsrate: 0,48 Gbit/s  
 Durchmesser Kabelmantel: ca. 3,3 mm

**USB-C™ to USB-C™ Textile Cable with Metal Plugs (Space Grey/Silver), 90°**

- enables fast charging with a maximum of 60 W (20 V, 3.0 A)
- angled plug prevents cable breakage
- with bend protection (designed for over 10,000 bending cycles)

Connections: 2x USB-C™ plug,  
 Max. transmission rate: 0.48 Gbit/s  
 Cable sheath diameter: approx. 3.3 mm

**Änderungen**

Datum	Name	gez.:	Datum	Name	Bezeichnung	Blatt
			10.05.2023	aw	DAT USB-C/C v2.0 90° Xm textil sw/si PL	1/1
			10.05.2023	aw		
		Norm:			Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					64658, 64659, 64660	

